

4W WARM-DIM 120V LED TAPE LIGHT

The **LSG40-WD** is a warm-dim 120V tape light offering the highest quality in direct-connect LED lighting. It can be ordered in custom lengths, in 4 inch increments and available with IP67 rating for outdoor or wet installations and applications.

	UPDATED: 07.11.24
Project	
Location	
Quote/ Ref #	



SPECIFICATIONS

POWER CONSUMPTION 4W per Ft.

LUMEN OUTPUT 220 Lumens per Ft.

CRI 90+
DIMMING TRIAC
MAXIMUM RUN LENGTH 164 Ft.

CUTTABLE Every 4.0 in (101.6mm)
BINNING MacAdam Ellipse 2-Step

OPERATING VOLTAGE 120V AC

OPERATING TEMPERATURE -22°F (-30°C) to +122°F (+50°C)

BEAM ANGLE 120°
IP RATING IP54, IP67
CERTIFICATIONS ETL Listed
LUMEN MAINTENANCE 50,000 Hrs.

FEATURES

- · Line Voltage Linear Light
- · 120V AC, No power supply required
- · Wet and Dry Locations
- · 90+ CRI
- · Suitable for Indoor/ Outdoor use
- · Custom length available every 4 in.
- · Dimmable
- · ETL Listed




MODEL	COLOR TEMP	LED LENGTH	VOLTAGE	POWER FEED	IP RATING
LSG40-WD	18/30K 1800K/3000K	' XX per Ft.	120 120 Volts	HWC36 36" Hardwire Power Feed Cable	IP54 Indoor/ Damp
				HWC72 72" Hardwire Power Feed Cable	IP67 Outdoor*
	 			HWC120 120" Hardwire Power Feed Cable	
	 			HWC240 240" Hardwire Power Feed Cable	1 1 1 1
	 	 		HWC-CUS Custom Length Wire	
				 	1 1 1 1
					:
		ength per FT. (cuttable every 4")			applications with direct exposure to rain/water (MADE TO ORDER - Please allow 3 weeks



4W WARM-DIM 120V LED TAPE LIGHT

DIMENSIONS

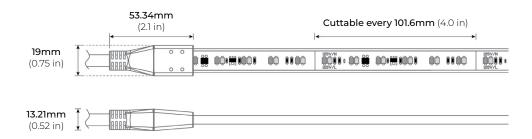


COMPATIBLE ACCESSORIES

MOUNTING CHANNEL

LSG-AC48 LSG-AC96

48"AND 96" ALUMINUM CHANNEL



MOUNTING CHANNEL & MOUNTING CLIP


LSG-CN48


48" ALUMINUM CHANNEL

LSG-CN-CL

MOUNTING CLIP


* INCLUDED WITH LSG-CN48





LSG-PC48

48" PLASTIC CHANNEL



MOUNTING CHANNEL & FROSTED LENS

LSG-AC2000FR-48 LSG-AC2000FR-84

48"AND 84" ALUMINUM CHANNEL

LSG-AC2000FR-EC


END CAP

* SOLD SEPARATELY

LSG-AC2000FR-MC

MOUNTING CLIP

- * 2PCS INCLUDED WITH EVERY 48"
- * 4PCS INCLUDED WITH EVERY 84"





4W WARM-DIM 120V LED TAPE LIGHT

COMPATIBLE ACCESSORIES

MOUNTING CHANNEL & FROSTED LENS

LSG-AC3100FR-48-SI

48" CHANNEL (SILVER)

LSG-AC3100FR-84-SI

84" CHANNEL (SILVER)

LSG-AC3100FR-96-WH

96" PROFILE (WHITE)

LSG-AC3100FR-96-BK

96" PROFILE (BLACK)

LSG-AC3100FR-96-SI

96" PROFILE (SILVER)

LSG-AC3100-EC-WHEND CAP (WHITE)LSG-AC3100-EC-BKEND CAP (BLACK)LSG-AC3100-EC-SIEND CAP (SILVER)

* SOLD SEPARATELY

LSG-AC3100-ECH-WHEND CAP WITH HOLE (WHITE)LSG-AC3100-ECH-BKEND CAP WITH HOLE (BLACK)LSG-AC3100-ECH-SIEND CAP WITH HOLE (SILVER)

* SOLD SEPARATELY

LSG-AC3100FR-MC

MOUNTING CLIP

- * 2PCS INCLUDED WITH EVERY 48"
- * 4PCS INCLUDED WITH EVERY 84" AND 96"



MOUNTING CLIP

LSG-MC

MOUNTING CLIP




HARDWIRE POWER FEED CABLE

LSG-HWC36 36" HARDWIRE POWER FEED CABLE
LSG-HWC72 72" HARDWIRE POWER FEED CABLE
LSG-HWC120 120" HARDWIRE POWER FEED CABLE
LSG-HWC240 240" HARDWIRE POWER FEED CABLE



90° POWER CABLE

LSG-HWC72-L90 72" 90° HARDWIRE POWER FEED CABLE

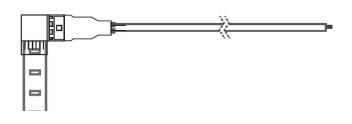



4W WARM-DIM 120V LED TAPE LIGHT

COMPATIBLE ACCESSORIES

POWER CABLE

LSG-PCA72 72" POWER FEED CABLE



LINK EXTENSION CABLE

LSG-LNK6 6" LINK CABLE LSG-LNK12 12" LINK CABLE LSG-LNK24 24" LINK CABLE

