

# ULS SERIES

## 120-277V SWITCHABLE CCT UNDERCABINET LED FIXTURE UNIVERSAL DIMMING 0-10V/ ELV/ TRIAC

Project \_\_\_\_\_  
Location \_\_\_\_\_  
Quote/ Ref # \_\_\_\_\_

Featuring a Switchable-CCT switching option, the **ULS Series** makes it easy to seamlessly change color temperatures with the flick of a switch. Change from 27K, 30K, 35K, 40K and 50K color temperatures instantly within the same fixture. Easy to use and install, the ULS Series undercabinet LED fixture mounts directly onto the surface. With a variety of lengths, colors and options available, the ULS Series is perfect for most lighting project requirements.



### SPECIFICATIONS

INPUT VOLTAGE	120V/ 277V
POWER CONSUMPTION	6W- 18W per Ft.
LUMEN OUTPUT	350 - 1250 Lumens per Ft.
CRI	90+
COLOR TEMPERATURE	27K/ 30K/ 35K/ 40K/ 50K
DIMMING	ELV, 0-10V and TRIAC
MAXIMUM RUN LENGTH	Up to 300W
OPERATING TEMPERATURE	-40°F (-40°C) to +140°F (+60°C)
BEAM ANGLE	110°
IP RATING	IP45
FINISH	White
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs.
DIMENSIONS	89 x 25.4mm (3.5 x 1") (WxH)

### FEATURES

- 6W - 18W
- Up to 1250 Lumens
- 11 in - 42 in length options
- 90+ CRI
- Switchable CCT 27K/ 30K/ 35K/ 40K/ 50K
- Universal Dimming 0-10V/ ELV/ TRIAC
- Suitable for accent or ambient lighting
- Superior Color Rendering Index (CRI)
- Linkable
- UL Listed

MODEL	ULS11	ULS14	ULS22	ULS28	ULS33	ULS42
LENGTH	11"	14"	22"	28"	33"	42"
WATTS	6W	8W	10W	12W	15W	18W




MODEL	LENGTH	FINISH	VOLTAGE
ULS	11 11"	WH White	UNV 120-277V
	14 14"		
	22 22"		
	28 28"		
	33 33"		
	42 42"		

# ULS SERIES


120-277V SWITCHABLE CCT UNDERCABINET LED FIXTURE  
UNIVERSAL DIMMING 0-10V/ ELV/ TRIAC

## DIMENSIONS


ULS-11  
6W | 11 INCHES

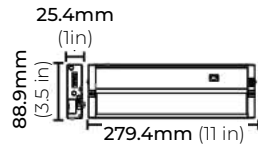


ULS-14  
8W | 14 INCHES

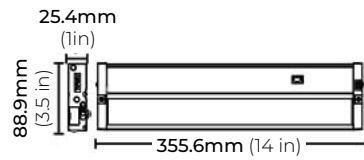


ULS-22  
10W | 22 INCHES

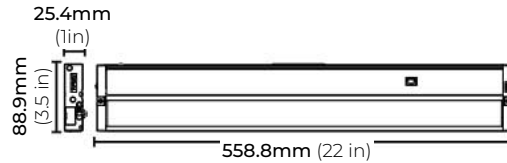


ULS-28  
12W | 28 INCHES

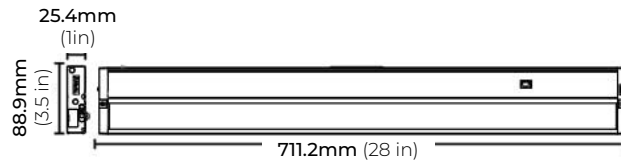

ULS-33  
15W | 33 INCHES

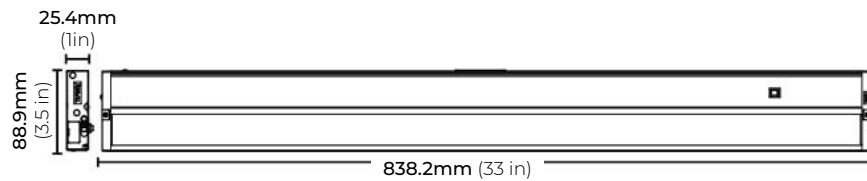






ULS-42  
18W | 42 INCHES

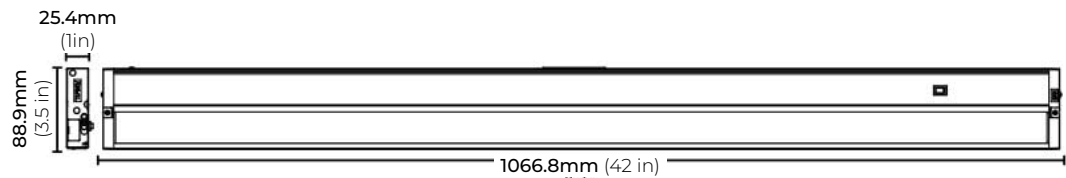

# ULS SERIES

120-277V SWITCHABLE CCT UNDERCABINET LED FIXTURE  
UNIVERSAL DIMMING 0-10V/ ELV/ TRIAC

## PHOTOMETRICS

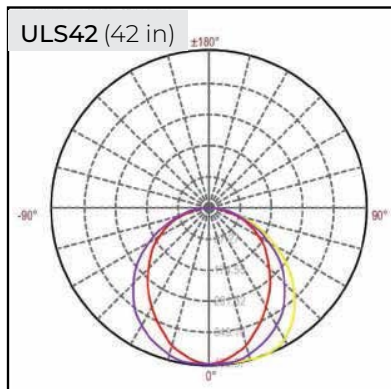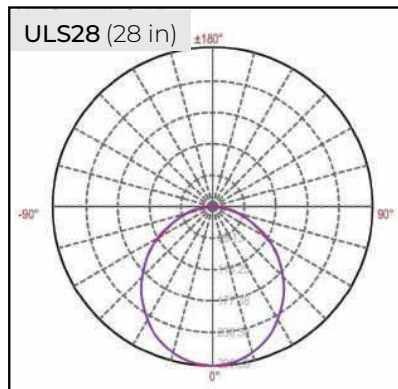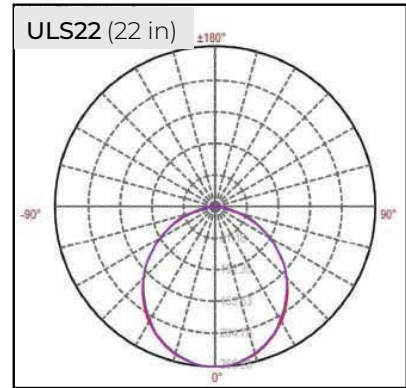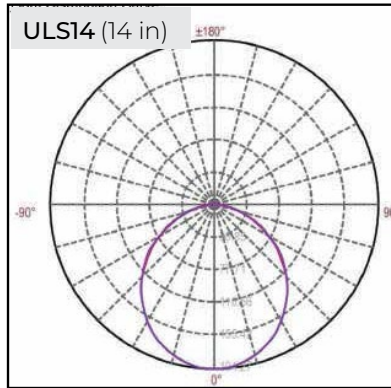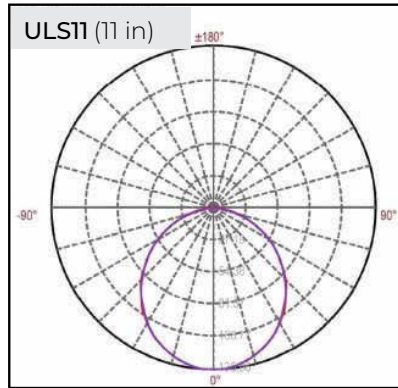

## COMPATIBLE ACCESSORIES

ULS-SMC-WH (white)  
SEAMLESS COUPLING  
\* INCLUDED WITH EACH FIXTURE



ULS-LNK6-WH (white)  
6" INTER LINK CABLE

ULS-LNK12-WH (white)  
12" INTER LINK CABLE



ULS-LNK24-WH (white)  
24" INTER LINK CABLE

ULS-PCA-60-WH (white)  
60" AC DIRECT PLUGIN POWER FEED CABLE



ULS-HWC-72-WH (white)  
72" HARDWIRE POWER FEED CABLE

