

SLINQ RGB


RGB FLEXIBLE 360° ROUND NEON SERIES

Project _____

Location _____

Quote/ Ref # _____

Slinq RGB— IP65 rated, flexible neon rope light is a true game-changer, with its 360° illuminating capabilities and vibrant RGB color options. Unleash your creativity to create any desired shape, freeform pattern, grid, icicle chandeliers, or simply drape it along walls and ceilings. Perfect for any project, whether you're looking to create an eye-catching centerpiece or simply add some ambiance to your living space.

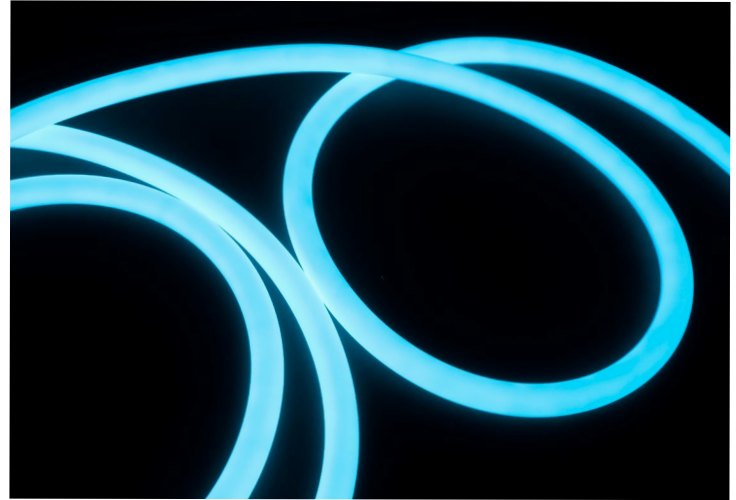

SPECIFICATIONS

POWER CONSUMPTION	4.4W per foot
LUMEN OUTPUT	317 Lm/ Ft.
CRI	90+
COLOR TEMPERATURE	RGB
MAXIMUM RUN LENGTH	16 Ft.
OPERATING VOLTAGE	24V
STORAGE TEMPERATURE	-30°C to 60°C
OPERATING TEMPERATURE	30°C (-22°F) to 55°C (131°F)
BEAM ANGLE	360°
IP RATING	IP65 Outdoor/ Wet Location
LUMEN MAINTENANCE	50,000 Hrs.

FEATURES

- 360° Light Source
- Multiple Mounting Options
- DMX Control
- IP65 Outdoor Rated
- Factory-Installed Power Feed
- Injection Moulded End-Caps
- Ideal for Decorative, Retail, Artistic Lighting





MODEL	LENGTH	COLOR TEMP	VOLTAGE	MOUNTING OPTIONS	POWER FEED
SLQ-25	Per Inch Per Inch	RGB RGB	24V 24 Volts	AR Arch	EF72 72" End Feed
				SF Surface Pendant	SF72 72" Side Feed
				SUP Suspended Pendant	
				SCS Suspension Cable Support	
				TES Telescopic Extension Support	

SLINQ RGB



RGB FLEXIBLE 360° ROUND NEON SERIES

MOUNTING OPTIONS


ARCH (AR)





MOUNT CAP 1





MOUNT CAP 2




SURFACE PENDANT (SF)





END CAP

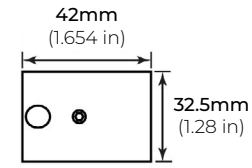



CEILING MOUNT



SUSPENDED PENDANT (SUP)






END CAP

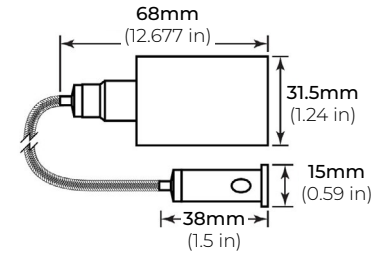


SUSPENDED PENDANT

* Cable Length = 72"


SUSPENSION CABLE SUPPORT (SCS)

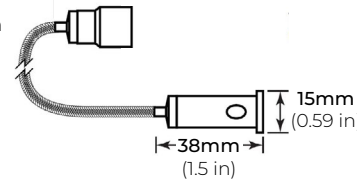



* 72" Cable included



TELESCOPIC EXTENSION SUPPORT (TES)



* 13 - 24" Extension




SLINQ RGB


RGB FLEXIBLE 360° ROUND NEON SERIES

ACCESSORIES



VISIBLE MOUNTING CLIP (VMC)




DISCREET MOUNTING BRACKET (DMB)

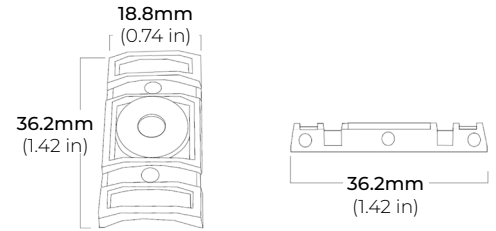


INFINITY JOINER (IJ)

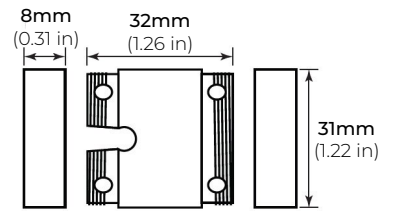



SLQ25-RTS-39-S
39" RIGID TUBE

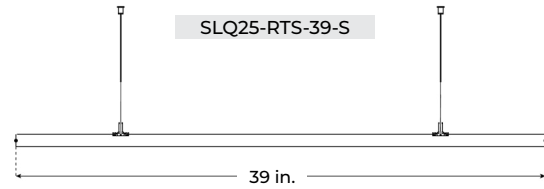


SLQ25-RTS-78-S
78" RIGID TUBE

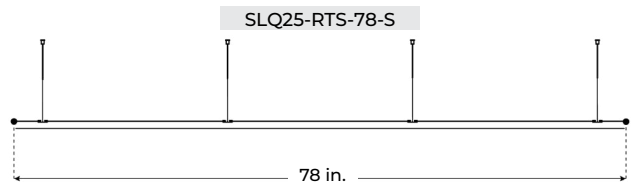

DIMENSIONS

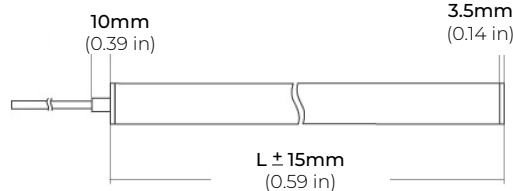

END FEED

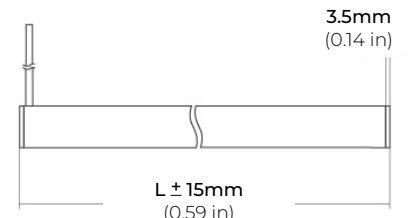

SIDE FEED

SLINQ RGB


RGB FLEXIBLE 360° ROUND NEON SERIES

DMX CONTROLLERS

RGB CT600

MULTI-FUNCTION RGBW WALL CONTROLLER

INPUT VOLTAGE	5V DC, 1A
OUTPUT SIGNAL	RF 2.4GHZ + DMX512
CONTROL	4 ZONES
COLOR OPTIONS	Black/ White
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.19"x7.08"x1.38")

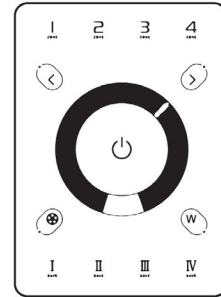

RGB-SCW4

WiFi DMX WALL CONTROLLER


INPUT VOLTAGE	5 - 10V DC, 06A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ 8dry contact ports/ Open drain output (for relay)
MEMORY	Built-In Flash
WORKING TEMP	-10°C ~ 45°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



RGB-SDE3

WiFi DMX WALL CONTROLLER

INPUT VOLTAGE	6V DC, 0.6A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC/ Tablet/ Smartphone
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ Ethernet/ RS232/ CLock/ 8dry contact ports/ 5V output relay
MEMORY	MicroSD Card
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")




SLINQ RGB

RGB FLEXIBLE 360° ROUND NEON SERIES

DMX DECODERS

RGB-DMX-4C-RJ45 4-CHANNEL DMX DECODER

INPUT VOLTAGE 12V-24V DC
OUTPUT CURRENT 5A X 4CH
OUTPUT WATTAGE 60W(12V), 120W(24V)
OUTPUT CHANNELS 4
DIMENSIONS LxWxH (7"x1.77"x0.75")

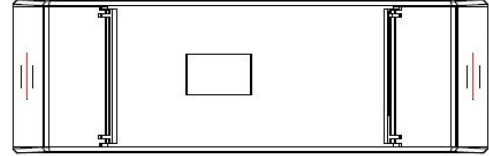

RGB-DMX-5C-XLR 5-CHANNEL DMX DECODER

INPUT VOLTAGE 12V-24V DC
OUTPUT CURRENT 8A X 5CH
OUTPUT WATTAGE 5 x (96W ~ 192W)
OUTPUT CHANNELS 5
DIMENSIONS LxWxH (6.45"x2.87"x1.5")

