

# LINEAR-PIXEL BAR


## 120V-277V INDOOR/ OUTDOOR ACCENT LIGHT

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

The **Linear Pixel Bar** is a powerful 120V LED linear luminaire ideal for media facades and delineation of largescale structures such as bridges and towers. IP66-rated for outdoor applications, the Linear Pixel Bar's acrylic square or rounded diffuser lenses produce perfectly uniform and saturated light that can be controlled with up to 12 inch resolution for dynamic shows and monochrome video effects.

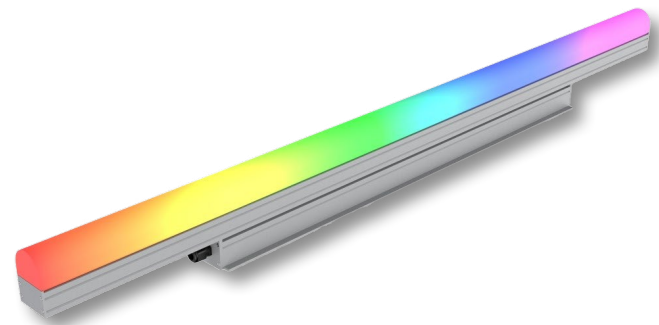

### SPECIFICATIONS

INPUT VOLTAGE	120V-277V
POWER CONSUMPTION	8W per Ft.
LEDS PER FIXTURE	12 LEDs (24") 18 LEDs (36") 24 LEDs (48")
PIXELS	Addressable Every 2 in./ 4 in./ Single
LUMEN OUTPUT	Up to 265 Lm/ Ft. (Square Lens) Up to 260 Lm/ Ft. (Round Lens)
BEAM ANGLE	140° x 110° (Square Lens) 180° x 110° (Round Lens)
COLOR TEMPERATURE	RGB+18K/ RGB+27K/ RGB+30K/ RGB+40K/ RGB+65K
DIMMING/ CONTROL	DMX
MAXIMUM RUN LENGTH	20 Ft. (2" Increment Fixture Control) 40 Ft. (4" Increment Fixture Control) 100 Ft. (Single DMX Fixture Control)
IP RATING	IP66 Wet Location Rated
AMBIENT TEMPERATURE	-4°F (-20°C) to +122°F (+50°C)
LUMEN MAINTENANCE	50,000 Hrs.
CERTIFICATIONS	UL Listed
WARRANTY	5 years

### FEATURES

- 120V-277V
- 8W per Ft
- 265 Lumens per Ft.
- DMX Control
- IP66 Wet Location
- UL Listed




MODEL	CONTROL	LENGTH	COLOR TEMP	MOUNTING	LENS	FINISH
LPX120	<b>STD</b> Single Address	<b>24</b> 23.62 in.	<b>RGBW18K</b> RGB + 1800K	<b>*FMB</b> Fixed Mounting	<b>SQ</b> Square	<b>WH</b> White
	<b>2PX</b> 2 in. Pixel	<b>36</b> 35.43 in.	<b>RGBW27K</b> RGB + 2700K	<b>AM</b> Adjustable Mounting	<b>RN</b> Round	<b>BK</b> Black
	<b>4PX</b> 4 in. Pixel	<b>48</b> 47.24 in.	<b>RGBW30K</b> RGB + 3000K			<b>GR</b> Grey
			<b>RGBW40K</b> RGB + 4000K			
			<b>RGBW65K</b> RGB + 6500K			
				*Standard Mounting		


# LINEAR-PIXEL BAR

120V-277V INDOOR/ OUTDOOR ACCENT LIGHT


## DIMENSIONS




SQUARE LENS




ROUND LENS

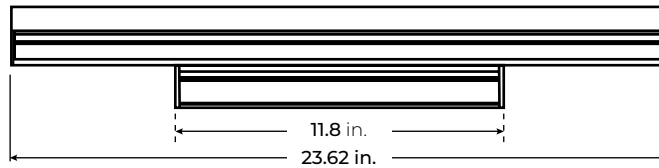

LPX120-24

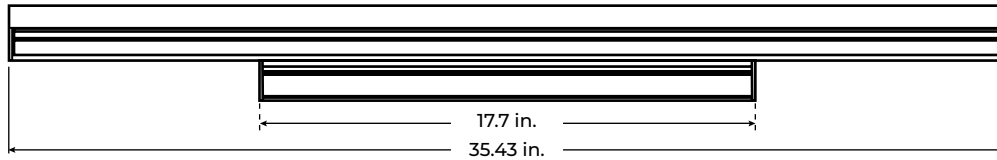


LPX120-36

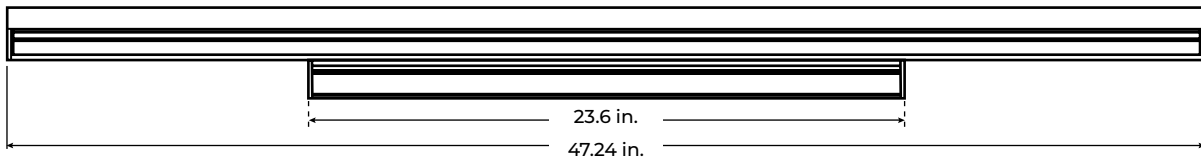


LPX120-48

## OPTICS

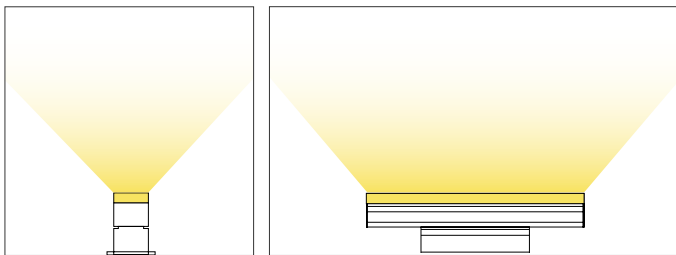

SQUARE LENS

140° x 110°

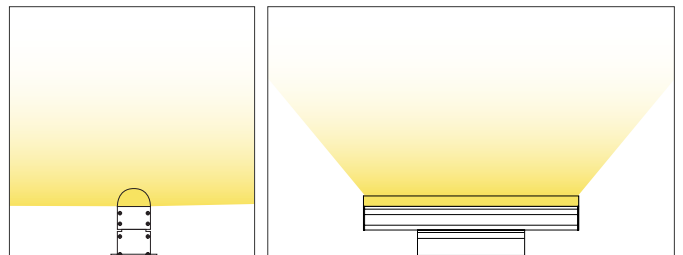

ROUND LENS


180° x 110°

# LINEAR-PIXEL BAR


120V-277V INDOOR/ OUTDOOR ACCENT LIGHT

## MOUNTING OPTIONS

LPX120-FMB  
FIXED MOUNTING  
\*Standard Mounting

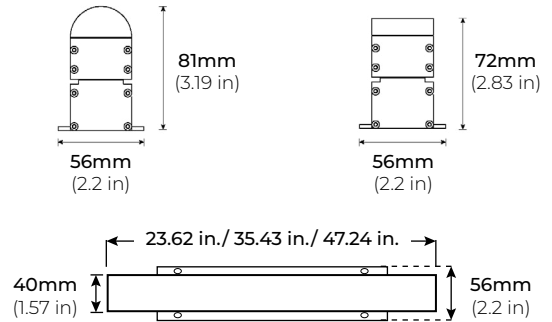

LPX120-AM  
ADJUSTABLE MOUNTING

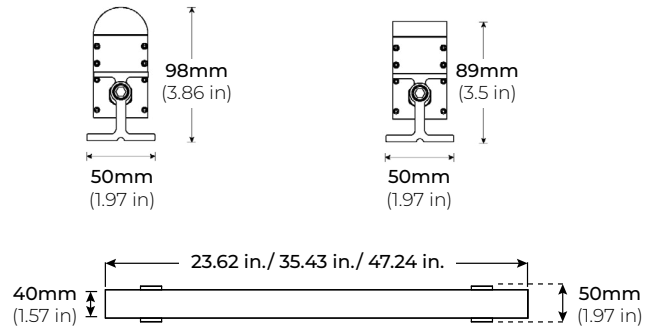

## COMPATIBLE ACCESSORIES

LPX120-LNK-10  
LPX120-LNK-36  
LPX120-LNK-72  
10", 36", 72" LINK EXTENSION CABLE  
\*Sold Separately



LPX120-HWC-72  
LPX120-HWC-120  
72" AND 120" HARDWIRE CABLE  
\*Sold Separately

