

LSH-20N

2.0W 120V OUTDOOR FLEXIBLE LED STRIP

Project _____
Location _____
Quote/ Ref # _____

LSH-20N is a dimmable flexible LED strip capable of delivering up to 147 Lumens of light output per foot. These flexible LED lights is cuttable every 19.5", and produces a 120° light beam spread. These strips are great for common commercial and residential lighting applications such as under cabinet and cove lighting, shelf and display lighting, interior signage, exhibit lighting and more. Flux LED series are bright eco-friendly LED strips.



SPECIFICATIONS

INPUT VOLTAGE	120V DC
POWER CONSUMPTION	2W/Ft.
NO. OF LEDS	19 LEDs per Ft.
LUMEN OUTPUT	147 Lm/Ft. (40K)
CRI	95+
COLOR TEMPERATURE	30K / 40K
DIMMING	Compatible with CL Dimmers
MAXIMUM RUN LENGTH	150 Ft.
CUTTABLE	Every 19.5 in (495.3mm)
BINNING	1.5 Step Macadam Elipse
OPERATING TEMPERATURE	-40°F (-40°C) ~ 140°F (60°C)
BEAM ANGLE	120°
IP RATING	IP65 wet location (outdoor)
CERTIFICATIONS	UL Listed, TITLE 24 JA8
LUMEN MAINTENANCE	50,000 Hrs

FEATURES

- Suitable for accent or ambient lighting
- 120V DC, No Power Supply Required
- Dimmable with CL dimmers
- California TITLE 24 JA8 Compliant
- Superior COLOR RENDERING INDEX (CRI)
- UL listed

*Approved for closet / storage space installation per NEC 410.16(A)(3) and 410.16(C)(5)




MODEL	COLOR TEMP	LENGTH	VOLTAGE
LSH20N	WW Warm White 3000K	50 50 Ft.	120 120V DC
	CW Cool White 4000K	150 150 Ft.	
	1'PF Per Ft.		
		*1 = Custom length per FT. (Cuttable every 19.5")	

LSH-20N

2.0W 120V OUTDOOR FLEXIBLE LED STRIP



DIMENSIONS

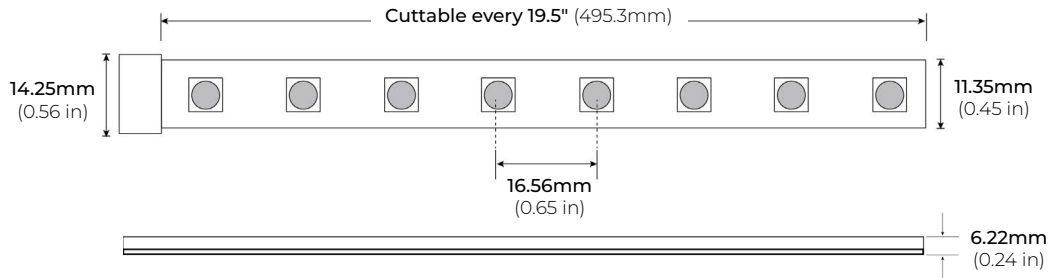

COMPATIBLE ACCESSORIES



LSH20N-AC2
2" ALUMINUM CHANNEL

LSH20N-AC36
36" ALUMINUM CHANNEL

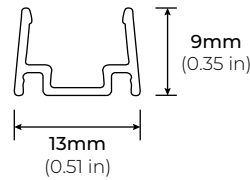

LSH20N-PC36
36" PLASTIC CHANNEL

LSH20N-PC39
39" PLASTIC CHANNEL

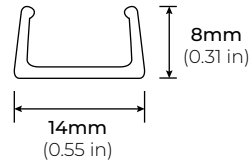

LSH20N-CL
CLEAR MOUNTING CLIPS
*1 PAIR INCLUDED



LSH20N-MC
SEAMLESS CONNECTOR



LINK EXTENSION CABLE

LSH20N-LNK2
2" LINK CABLE

LSH20N-LNK8
8" LINK CABLE



POWER CABLE

LSH20N-PCA60
60" POWER FEED CABLE WITH END CAP

