4W WARM-DIM 120V LED TAPE LIGHT

The **LSG40-WD** is a warm-dim 120V tape light offering the highest quality in direct-connect LED lighting. It can be ordered in custom lengths, in 4 inch increments and available with IP67 rating for outdoor or wet installations and applications.

SPECIFICATIONS

POWER CONSUMPTION	4W per Ft.		
LUMEN OUTPUT	220 Lumens per Ft.		
CRI	90+		
DIMMING	TRIAC		
MAXIMUM RUN LENGTH	164 Ft.		
CUTTABLE	Every 4.0 in (101.6mm)		
BINNING	MacAdam Ellipse 2-Step		
OPERATING VOLTAGE	120V AC		
OPERATING TEMPERATURE -22°F (-30°C) to +122°F (+50°C)			
BEAM ANGLE	120°		
IP RATING	IP54, IP67		
CERTIFICATIONS	ETL Listed		
LUMEN MAINTENANCE	50,000 Hrs.		



	UPDATED: 10.23.24
Project	
Location	
Quote/ Ref #	



FEATURES

- Line Voltage Linear Light
- 120V AC, No power supply required
- Wet and Dry Locations
- 90+ CRI
- Suitable for Indoor/ Outdoor use
- · Custom length available every 4 in.
- Dimmable
- ETL Listed




MODEL	COLOR TEMP	LED LENGTH	VOLTAGE	POWER FEED	IP RATING
LSG40-WD 18/30K 1800K/3000K		י XX per Ft.	120 120 Volts	HWC36 36" Hardwire Power Feed Cable	IP54 Indoor/ Damp
				HWC72 72" Hardwire Power Feed Cable	IP67 Outdoor*
	, , , , , , , , , , , , , , , , , , ,		HWC120 120" Hardwire Power Feed Cable	, 1 1 1	
			HWC240 240" Hardwire Power Feed Cable	 	
			HWC-CUS Custom Length Wire	, 1 1 1	
	- - - - - -	, , , , , , , , , , , , , , , , , , ,			, 1 1 1
		*1 = Custom length per FT. (cuttable every 4")			* = Ideal for applications with direct exposure t rain/water (MADE TO ORDER Please allow 3 weel lead time)



4W WARM-DIM 120V LED TAPE LIGHT

DIMENSIONS

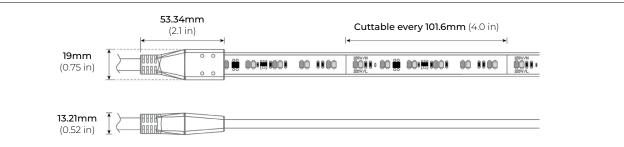

COMPATIBLE ACCESSORIES

MOUNTING CHANNEL T 8.13mm LSG-AC48 (0.32 in) LSG-AC96 1 48"AND 96" ALUMINUM CHANNEL 18.54mm (0.73 in) **MOUNTING CHANNEL & MOUNTING CLIP** LSG-CN48 26.37mm 20.66mm 48" ALUMINUM CHANNEL (1.04 in) (0.81 in) 20.07mm 16mm (0.79 in) (0.63 in) LSG-CN-CL MOUNTING CLIP 20.52mm * INCLUDED WITH LSG-CN48 (0.81 in) LSG-CN48 LSG-CN-CL 10.92mm LSG-PC48 (0.43 in)


48" PLASTIC CHANNEL

MOUNTING CHANNEL & FROSTED LENS

LSG-AC2000FR-48 LSG-AC2000FR-84 48"AND 84" ALUMINUM CHANNEL

LSG-AC2000FR-EC END CAP * SOLD SEPARATELY

LSG-AC2000FR-MC MOUNTING CLIP * 2PCS INCLUDED WITH EVERY 48" * 4PCS INCLUDED WITH EVERY 84"



19.3mm (0.76 in)

4W WARM-DIM 120V LED TAPE LIGHT

COMPATIBLE ACCESSORIES

MOUNTING CHANNEL & FROSTED LENS

LSG-AC3100FR-48-SI 48" CHANNEL (SILVER)

LSG-AC3100FR-84-SI 84" CHANNEL (SILVER)

LSG-AC3100FR-96-SI 96" PROFILE (SILVER)

LSG-AC3100-EC-SI END CAP (SILVER) * SOLD SEPARATELY

LSG-AC3100-ECH-SI END CAP WITH HOLE (SILVER) * SOLD SEPARATELY

LSG-AC3100FR-MC MOUNTING CLIP * 2PCS INCLUDED WITH EVERY 48" * 4PCS INCLUDED WITH EVERY 84" AND 96"

MOUNTING CLIP

LSG-MC MOUNTING CLIP

HARDWIRE POWER FEED CABLE

LSG-HWC3636" HARDWIRE POWER FEED CABLELSG-HWC7272" HARDWIRE POWER FEED CABLELSG-HWC120120" HARDWIRE POWER FEED CABLELSG-HWC240240" HARDWIRE POWER FEED CABLE

90° POWER CABLE

LSG-HWC72-L90 72" 90° HARDWIRE POWER FEED CABLE



80

Щ

24mm (0.94 in) **25mm** (0.98in)

> **25mm** (0.98in)









4W WARM-DIM 120V LED TAPE LIGHT

COMPATIBLE ACCESSORIES

POWER CABLE

