

ICON

IP69K LINEAR LED LUMINAIRE

Project _____
Location _____
Quote/ Ref # _____

The **ICON** is a versatile linear luminaire engineered to withstand prolonged exposure to harsh environments. With an IP69K rating and a variety of color temperature and lens optic options, the ICON is an ideal solution for a wide range of applications.



SPECIFICATIONS

INPUT VOLTAGE	24V 120-277V
POWER CONSUMPTION	9W/ Ft.
LUMEN OUTPUT	810 Lm/ Ft.
CRI	90+
COLOR TEMPERATURE	30K/ 40K/ 50K
BEAM ANGLE	20°/ 30°/ 45°/ 20°x40°
DIMMING	0-10V
MAX RUN	Linkable up to 24 Fixtures (12") Linkable up to 12 Fixtures (24") Linkable up to 6 Fixtures (48")
OPERATING TEMPERATURE	-4°F (-20°C) ~ 113°F (45°C)
IP RATING	IP68/ 69K, Harsh Environment
LUMEN MAINTENANCE	50,000 Hrs.

FEATURES

- 90+ CRI
- IP68/ 69K Rated
- Durable, stainless steel
- Proprietary Optical Technology
- Facade Wall Washing
- Quick and Easy Installation




MODEL	LENGTH	COLOR TEMP	OPTICS	FINISH	VOLTAGE	DIMMING
ICON	12 12.8" (9W)	30K 3000K	20 20°	SI Silver	24V* 24V	ND No Dimming
	24 24.4" (18W)	40K 4000K	30 30°		UNV 120-277V	D10 0-10V Dimming (120-277V)
	48 48.1" (36W)	50K 5000K	45 45°			
			2040 20° x 40°			


* Remote Driver

IP69K LINEAR LED LUMINAIRE


DIMENSIONS

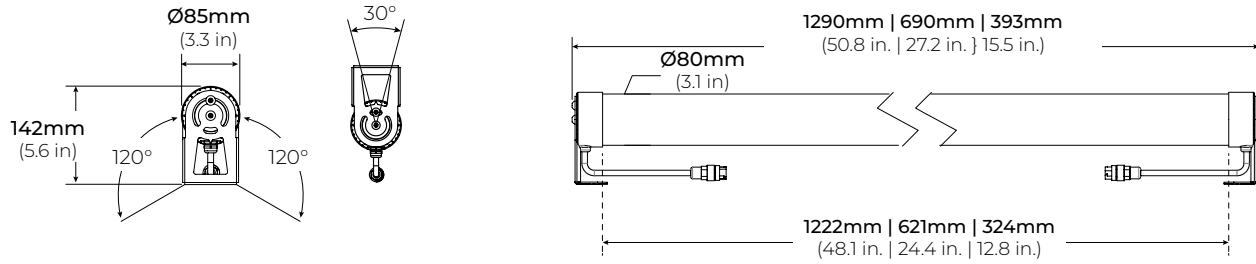

OPTICS

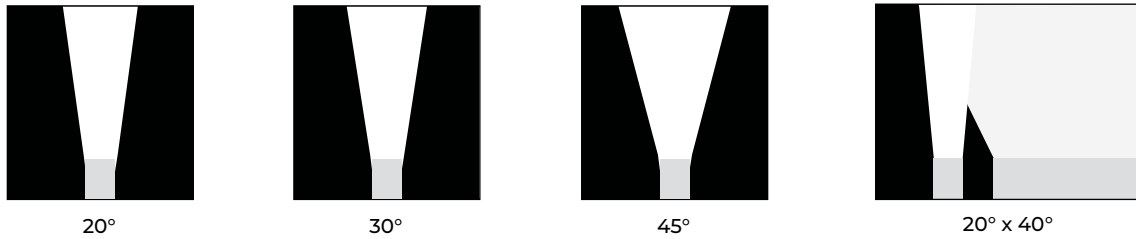

PHOTOMETRICS

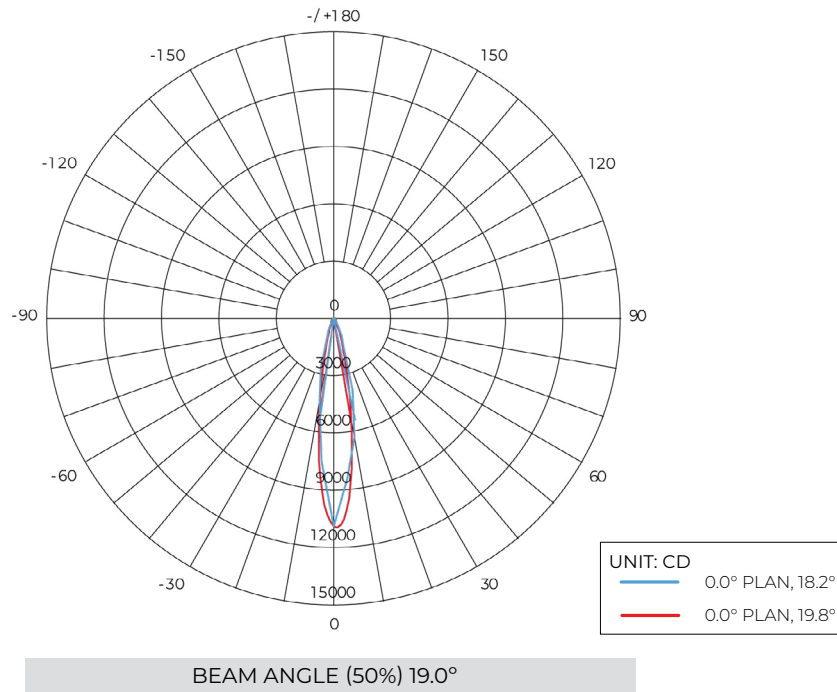

IP69K LINEAR LED LUMINAIRE

COMPATIBLE ACCESSORIES

ICON-LNK-10
ICON-LNK-36
ICON-LNK-72
10", 36", 72" LINK EXTENSION CABLE
*Sold Separately



ICON-HWC-72-BK
72" HARDWIRE CABLE
*Sold Separately

