

# LSMW25

## 2.2W OUTDOOR FLEXIBLE LED STRIP

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

**LSMW-25** is an outdoor flexible LED strip capable of delivering 185 Lumens of light output per Ft. This 24V LED strip is dimmable and rated to last 50,000 hours making it an excellent replacement for halogen lighting. Its innovative low profile design makes it suitable for cove lighting, architectural and aesthetic enhancements.



### SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	2.2W/Ft.
NO. OF LEDS	18 LEDs per Ft.
LUMEN OUTPUT	185 Lm/Ft. (3000K)
CRI	95+
COLOR TEMPERATURE	24K / 27K / 30K / 35K / 40K / 50K / 60K
DIMMING	MLV, ELV, 0-10 and TRIAC
MAXIMUM RUN LENGTH	30 Ft.
CUTTABLE	Every 3.92 in (99.64mm)
BINNING	1.5 Step Macadam Elipse
OPERATING TEMPERATURE	-40°F (-40°C) ~ +140°F (+60°C)
BEAM ANGLE	120°
IP RATING	IP65 wet location (outdoor)
CERTIFICATIONS	UL Listed, TITLE 24 JA8
LUMEN MAINTENENACE	50,000 Hrs.

### LUMENS

CCT	LM/ FT	CRI	R9	R13
2400K	174	92	67	95
2700K	185	93	80	96
3000K	185	90	71	93
3500K	195	90	72	94
4000K	201	91	76	94
5000K	206	93	84	97
6000K	209	90	73	94

\*Approved for closet / storage space installation per NEC 410.16(A)(3) and 410.16(C)(5)




MODEL	COLOR TEMP	LENGTH	VOLTAGE	PROFILE
LSMW25	<b>24K</b> 2400K	<b>16</b> 16 Ft.	<b>24</b> 24V DC	See Page 2 for compatible profiles.
	<b>27K</b> 2700K	<b>25</b> 25 Ft.		
	<b>30K</b> 3000K	<b>32</b> 32 Ft.		
	<b>35K</b> 3500K	<b>1XX</b> per Ft.		
	<b>40K</b> 4000K			
	<b>50K</b> 5000K			
	<b>60K</b> 6000K	*1 = Custom length per FT. (Cuttable every 3.92")		* Custom color finishes require powder coating. Allow 7 days leads time.

# LSMW25

## 2.2W OUTDOOR FLEXIBLE LED STRIP

### DIMENSIONS

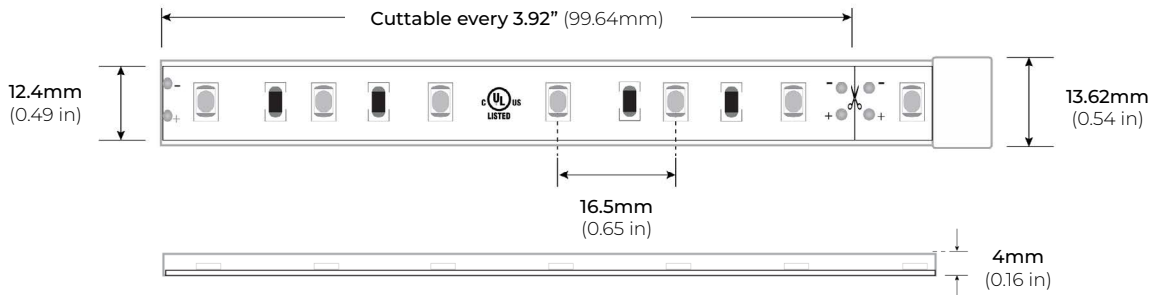


### COMPATIBLE ALUMINUM PROFILES

#### SURFACE PROFILES


##### ALU-DS100

LENGTHS 39" | 78" | 84"  
LENS Clear, Frosted  
FINISH Silver

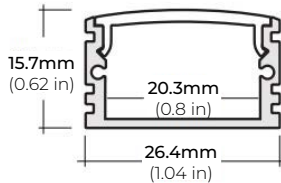


##### ALP-70

LENGTHS 49" | 84" | 98"  
LENS Frosted  
FINISH White | Black | Silver

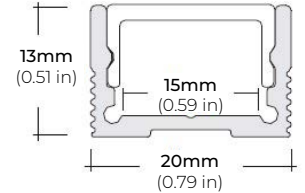


##### ALP-75C (CORNER)

LENGTHS 49" | 84" | 98"  
LENS Frosted  
FINISH Black | Silver

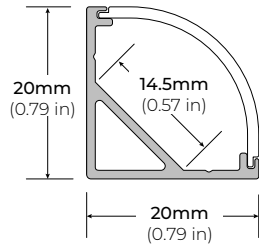


##### ALP-80

LENGTHS 49" | 98"  
LENS Frosted  
FINISH Silver

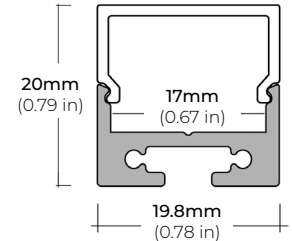


##### ALP-102

LENGTHS 49" | 98"  
LENS Frosted, Black, Asymmetric, Double Asymmetric  
FINISH Silver

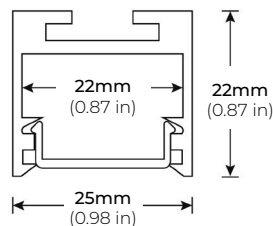

##### ALP-150LX

LENGTHS 49" | 98"  
LENS Frosted  
FINISH White | Black

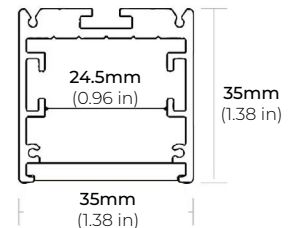


\* For more compatible profiles, visit [corelightingusa.com](http://corelightingusa.com)

#### RECESSED PROFILES


##### ALP-230RN

LENGTHS 49" | 98"  
LENS Frosted  
FINISH Silver

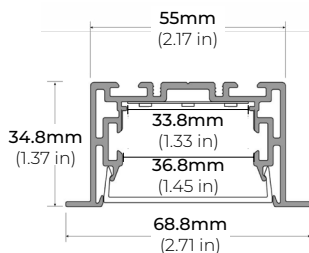

##### ALP-330RN

LENGTHS 49" | 98"  
LENS Frosted  
FINISH Silver

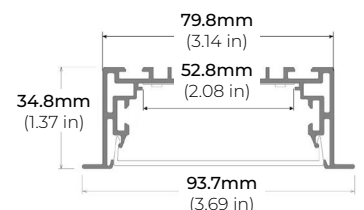

\* For more compatible profiles, visit [corelightingusa.com](http://corelightingusa.com)


# LSMW25

## 2.2W OUTDOOR FLEXIBLE LED STRIP

### COMPATIBLE TRANSFORMERS


#### PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.03"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.03"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		8.67" X 3.67" X 1.62"
PSDL-192W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

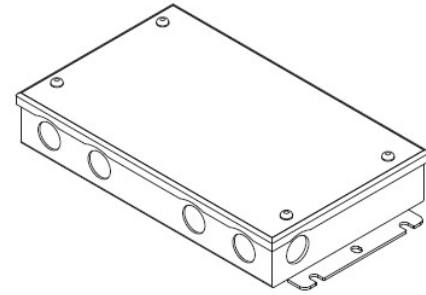


#### PSDH SERIES HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

PSDH-48W-24V	CLASS 2	11.25" X 3.37" X 3.25"
PSDH-96W-24V	CLASS 2	11.25" X 3.37" X 3.25"
PSDH-288W-24V	CLASS 2	14.25" X 8.43" X 4.43"

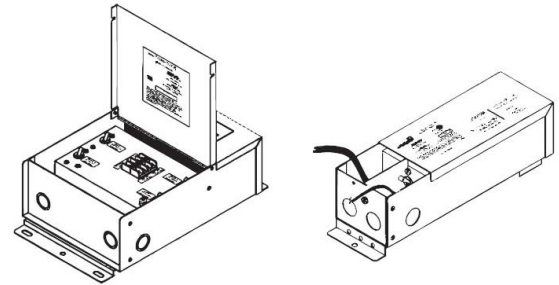


#### PSRX SERIES 4-IN-1 DIMMING DRIVER

PSRX-30W-24V	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V		10.24" X 4.13" X 1.77"
PSRX-192W-24V	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V		10.24" X 4.13" X 1.77"
PSRX-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V		10.94" X 4.33" X 1.77"

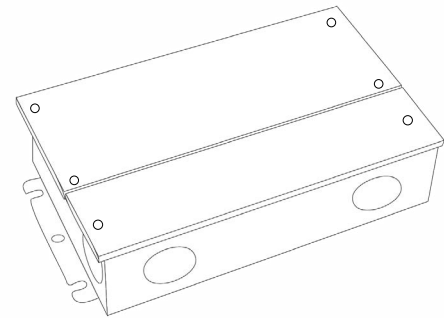

#### PSVT SERIES 0-10V DIMMING DRIVER

PSVT-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSVT-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSVT-200W-24V		10.24" X 4.13" X 1.77"
PSVT-288W-24V	CLASS 2	11.85" X 4.25" X 1.81"
PSVT-300W-24V		10.94" X 4.33" X 1.77"

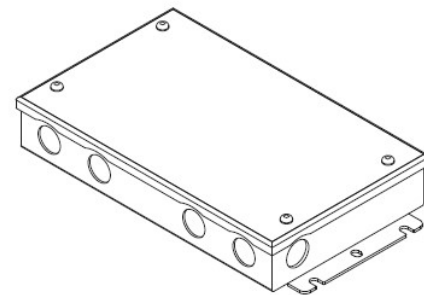


# LSMW25

## 2.2W OUTDOOR FLEXIBLE LED STRIP

### COMPATIBLE TRANSFORMERS


PSDE SERIES  
0-10V DIMMING W/ JUNCTION BOX

PSDE-60W-24V-010-JB      CLASS 2    12.1" X 2.36" X 1.4"  
PSDE-96W-24V-010-JB      CLASS 2    12.1" X 2.36" X 1.4"

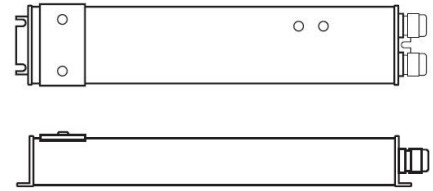


LUTRON 1%  
3-WIRE DIMMING

L3DA4U1UKL-CV240      CLASS 2    4.89" X 4" X 2.62"

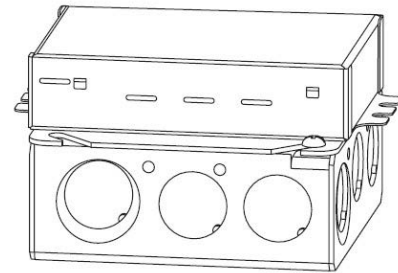

LUTRON 1%

PSDE-96W-24V-ECO      CLASS 2    10.5" X 3.0" X 2.0"



### COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES  
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V      CLASS 2    6.5" X 3.6" X 1.02"  
PSHK-60W-24V      CLASS 2    7.4" X 3.62" X 1.02"  
PSHK-96W-24V      CLASS 2    8.66" X 3.66" X 1.61"  
PSHK-150W-24V                 10.24" X 4.06" X 1.81"  
PSHK-200W-24V                 10.24" X 4.06" X 1.81"  
PSHK-288W-24V      CLASS 2    11.85" X 4.25" X 1.82"  
PSHK-300W-24V                 10.24" X 4.25" X 1.81"

