

# IGU-200

## IN-GROUND LINEAR UPLIGHT

Project \_\_\_\_\_  
Location \_\_\_\_\_  
Quote/ Ref # \_\_\_\_\_

**IGU-200** is an in-ground linear uplight featuring multiple beam angle options including long, narrow pattern and assymetric optic. Designed for in-ground/recessed installations in concrete or lawns, this fixture is ideal for wall washing and illuminating ground mounted signs and linear objects.



### SPECIFICATIONS

INPUT VOLTAGE	120-277V AC
POWER CONSUMPTION	9W
LUMEN OUTPUT	70 Lm/ W
COLOR TEMPERATURE	27K/ 30K / 35K/ 40K / 60K/ Red/ Green/ Blue/ Amber/ Yellow
BEAM ANGLE	8° / 15° / 30° / 45° / 60° / 10° x 40° / 20° x 60° Asymmetric
CRI	80+
DIMMING	0-10V, DMX, DALI and Casambi
HOUSING	Anodized Aluminum
LENS	Tempered Glass
LENS FRAME	Stainless Steel 316
OPERATING TEMPERATURE	-4°F (-20°C) ~ 122°F (50°C)
STORAGE TEMPERATURE	-4°F (-20°C) ~ 140°F (60°C)
IP RATING	IP67
IMPACT RATING	IK09
MAX LOAD	1000 lbs (500 kgs)
WEIGHT	1.43 kg/ ft.
CERTIFICATIONS	CE, RoHS, ETL
LUMEN MAINTENANCE	50,000

### FEATURES

- 120 - 277V AC
- Max load 1000 lbs (500kgs)
- Built-in Driver
- Stainless Steel Frame
- Clear Tempered Glass
- Recessed Housing Included




MODEL	LENGTH	COLOR TEMP		OPTIC		VOLTAGE	CONTROL	OPTIONS
IGU200	12 12 in. (9W)	27K	RD Red	8 8°	1040 H10° x V40°	UNV 120-277V	NDM No Dimming	OLV Optic Louver
		30K	GR Green	15 15°	2060 H20° x V60°			
	20 20 in. (12W)	35K	BL Blue	30 30°	ASY Asymmetric		D10 0-10V Dimming	HC Honeycomb Louver
	40 40 in. (24W)	40K	AM Amber	45 45°			DMX DMX	MG Micro Grill Shield
	60K	YL Yellow	60 60°		DALI Dali			
						CAS Casambi		


# IGU-200

## IN-GROUND LINEAR UPLIGHT

### DIMENSIONS

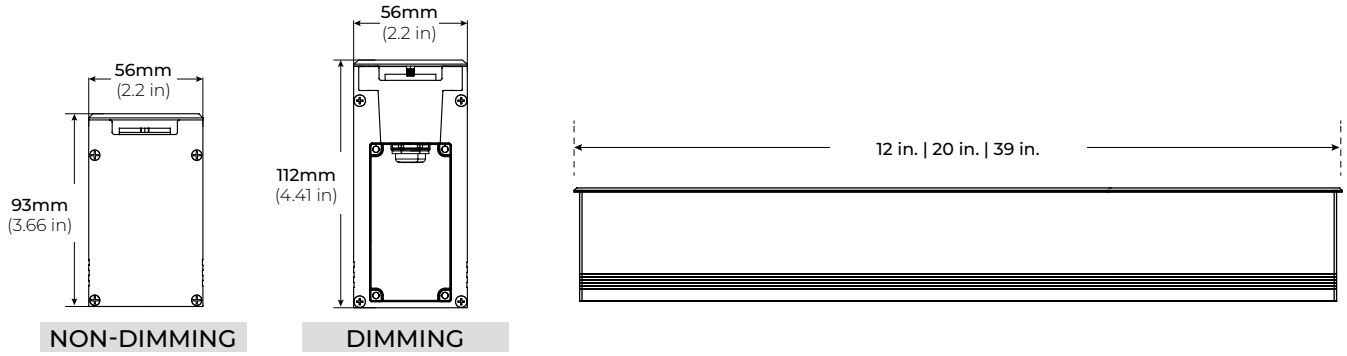

### OPTICS

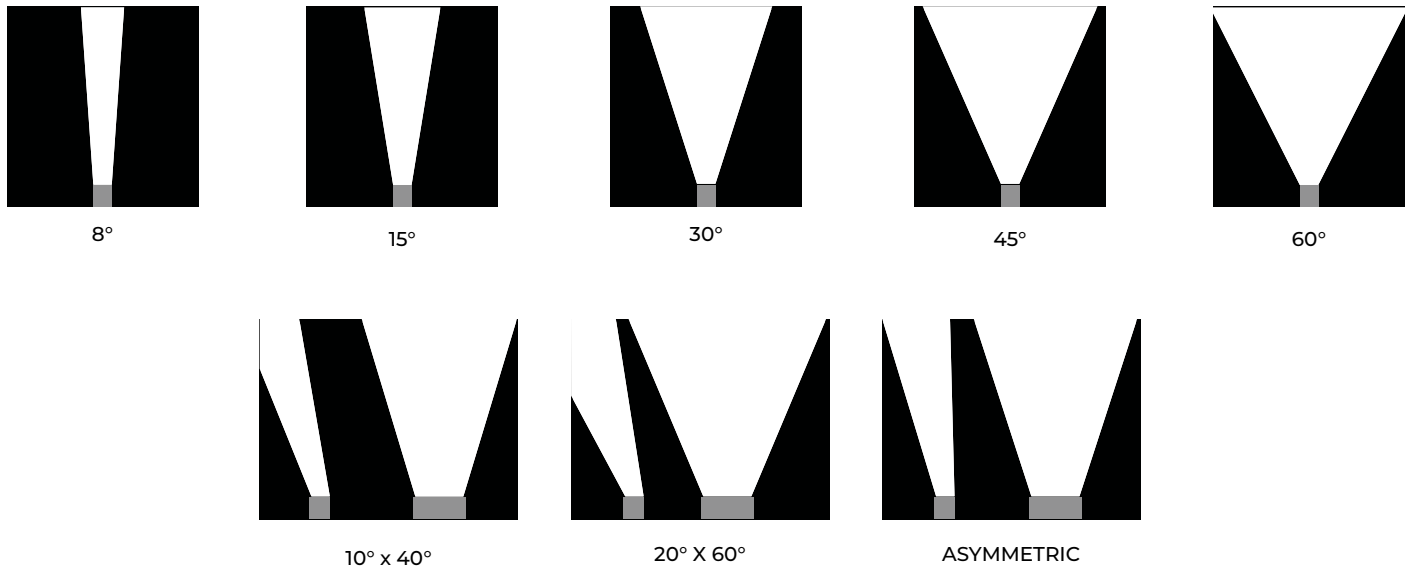

# IGU-200

## IN-GROUND LINEAR UPLIGHT


### OPTIONAL ACCESSORIES

---


IGU200-OLV  
OPTIC LOUVER



IGU200-HC  
HONEYCOMB LOUVER



IGU200-MG  
MICRO GRILL LOUVER



### PRODUCT OVERVIEW

---

