

# LWW-HO-RGB

## HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

**LWW-HO-RGB** is a Color-Changing Linear Wall washer that is a powerful LED flood light typically used for building facades, signs or any color-changing wall washing application. Multiple optical lens options provide a variety of lighting solutions. Available in narrow, medium, wide and elliptical optic options and compatible with DMX systems.



### SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	15W per Ft.
LUMEN OUTPUT	750 Lm/ Ft.
CRI	90+
COLOR TEMPERATURE	RGB
BEAM ANGLE	10°/ 15°/ 30°/ 15°x40°
DIMMING	DMX
MAX RUN	Linkable up to 12 ft.
OPERATING TEMPERATURE	-40°F TO 122°F (-40°C TO 50°C)
OPERATING TEMPERATURE	-40°F TO 176°F (-40°C TO 80°C)
BEAM ANGLE	15° / 20° / 25° / 50° / 10°x40°
IP RATING	IP65 wet location (outdoor)

### FEATURES

- 90+ CRI
- Linkable up to 12Ft.
- Proprietary Optical Technology
- Facade Wall Washing
- Graze Lighting
- Signage




MODEL	COLOR TEMP	LENGTH	OPTICS	OPTIONS
LWW-HO	RGB RGB	<b>12</b> 12" (9W)	<b>10</b> 10°	<b>FMB</b> Fixed Mounting Bracket
		<b>24</b> 24" (18W)	<b>15</b> 15°	<b>STB</b> Standard Tilting Bracket
		<b>48</b> 48" (36W)	<b>30</b> 30°	<b>ETB</b> Extended Tilting Bracket
			<b>15x40</b> 15° x 40°	


# LWW-HO-RGB

## HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

### DIMENSIONS

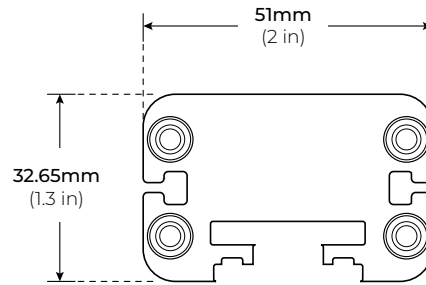


### OPTICS

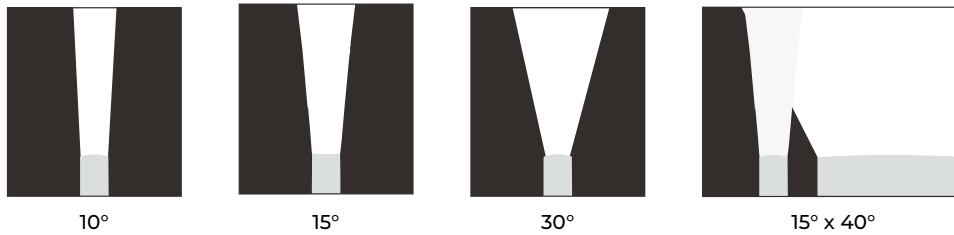


### MOUNTING ACCESSORIES


**LWW-FMB**  
FIXED MOUNTING BRACKET  
\*Sold Separately

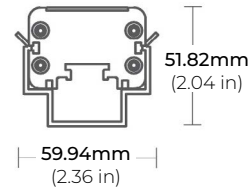

**LWW-STB**  
STANDARD TILTING BRACKET  
\*Included with every Fixture



**LWW-ETB**  
EXTENDED TILTING BRACKET  
\*Sold Separately




# LWW-HO-RGB



## HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

### COMPATIBLE ACCESSORIES



LWW-EC  
END CAP  
\*Sold Separately

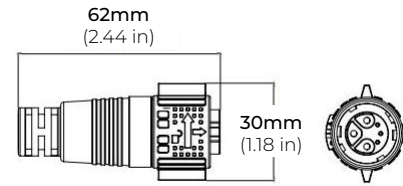

LWW-HO-12-ADLV  
LWW-HO-24-ADLV  
LWW-HO-36-ADLV  
LWW-HO-48-ADLV  
12", 24", 36", 48" ASYMMETRIC LOUVER  
\*Sold Separately



LWW-HO-12-SDLV  
LWW-HO-24-SDLV  
LWW-HO-36-SDLV  
LWW-HO-48-SDLV  
12", 24", 36", 48" SYMMETRIC LOUVER  
\*Sold Separately

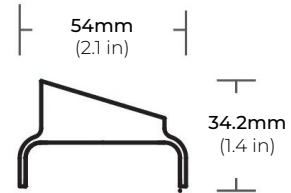

LWW-LNK-10-RGB  
LWW-LNK-36-RGB  
LWW-LNK-72-RGB  
10", 36", 72" LINK EXTENSION CABLE  
\*Sold Separately



LWW-HWC-72-BK  
72" HARDWIRE CABLE  
\*Sold Separately



# LWW-HO-RGB


## HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

### DMX CONTROLLERS

#### RGB CT600

MULTI-FUNCTION RGBW WALL CONTROLLER


INPUT VOLTAGE	5V DC, 1A
OUTPUT SIGNAL	RF 2.4GHZ + DMX512
CONTROL	4 ZONES
COLOR OPTIONS	Black/ White
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.19"x7.08"x1.38")

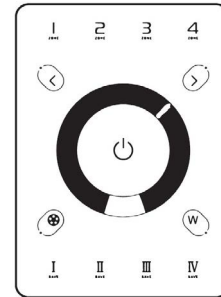

#### RGB-SCW4

WiFi DMX WALL CONTROLLER


INPUT VOLTAGE	5 - 10V DC, 06A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ 8dry contact ports/ Open drain output (for relay)
MEMORY	Built-In Flash
WORKING TEMP	-10°C ~ 45°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



#### RGB-SDE3

WiFi DMX WALL CONTROLLER

INPUT VOLTAGE	6V DC, 0.6A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC/ Tablet/ Smartphone
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ Ethernet/ RS232/ CLock/ 8dry contact ports/ 5V output relay
MEMORY	MicroSD Card
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



# LWW-HO-RGB


## HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

### DMX DECODERS

---

#### RGB-DMX-4C-RJ45 4-CHANNEL DMX DECODER


INPUT VOLTAGE	12V-24V DC
OUTPUT CURRENT	5A X 4CH
OUTPUT WATTAGE	60W(12V), 120W(24V)
OUTPUT CHANNELS	4
DIMENSIONS	LxWxH (7"x1.77"x0.75")

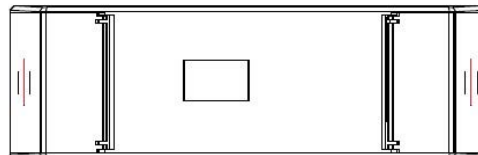

---

#### RGB-DMX-5C-XLR 5-CHANNEL DMX DECODER

INPUT VOLTAGE	12V-24V DC
OUTPUT CURRENT	8A X 5CH
OUTPUT WATTAGE	5 x (96W ~ 192W)
OUTPUT CHANNELS	5
DIMENSIONS	LxWxH (6.45"x2.87"x1.5")

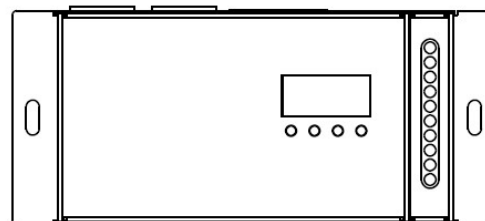

# LWW-HO-RGB

## HIGH-OUTPUT LINEAR COLOR-CHANGING WALL WASHER

**NON-DIMMING DRIVERS** (COMPATIBLE WITH ALL SYSTEMS)

### PSHK SERIES

NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

