

CORA DIRECT/INDIRECT


DIRECT/INDIRECT LINEAR LED WALL MOUNT

Project _____

Location _____

Quote/ Ref # _____

CORA DIRECT/INDIRECT is an architectural LED luminaire with direct/indirect light distributions. Offered in three lumen output options up to 704 lumens per foot, and frosted lens to eliminate any hotspots for a uniform beam of light. Manufactured from extruded aluminum with three standard powder-coated color options makes this low profile luminaire ideal for retail, office, school or commercial applications.

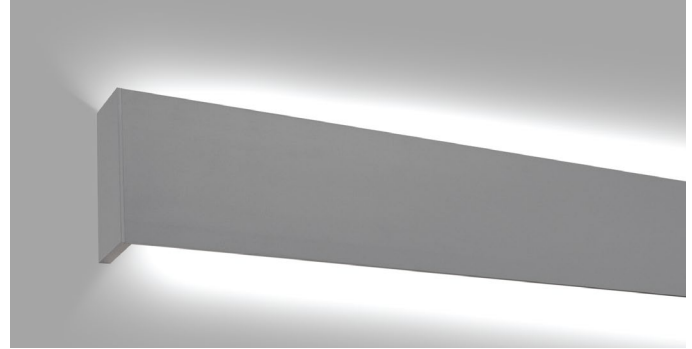

SPECIFICATIONS

INPUT VOLTAGE	24V
POWER CONSUMPTION	4W/ 5.5W/ 7W
LUMEN OUTPUT	704 Lm/ Ft. (30K)
BEAM ANGLE	180° (Downlight) 180° (Uplight)
COLOR TEMPERATURE	27K/ 30K/ 35K/ 40K/ 50K/ 65K
MAX RUN	Linkable up to 32 ft.
CRI	90
DIMMING	ELV, 0-10V, DALI and DMX
HOUSING	Extruded Aluminum
AMBIENT TEMPERATURE	-4° (-20°C) to 122° (50°C)
ENVIRONMENT	Dry/ Damp Locations
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs.
WARRANTY	5-Year Limited

FEATURES

- Wall Mounted Luminaire
- Quick and Easy Installation
- Multiple CCT options available
- UL Listed

LUMENS

CCT	WATTS (W/ FT.)	LM/FT (3000K)
L1	4W	440
L2	5.5W	529
L3	7W	704




MODEL	LENGTH	DOWNLIGHT	UPLIGHT	COLOR TEMP	FINISH	DRIVER
CORA	4 48"	DL1 4W	UL1 4W	27K 2700K	SI Silver	ELV ELV Dimming
	8 96"	DL2 5.5W	UL2 5.5W	30K 3000K	WH White	DIM10 0-10 Dimming
	CU Custom Length	DL3 7W	UL3 7W	35K 3500K	BK Black	DALI DALI Dimming
				40K 4000K	CC Custom Color	REM Remote Driver
				50K 5000K		
			65K 6500K			


CORA DIRECT/INDIRECT

DIRECT/INDIRECT LINEAR LED WALL MOUNT

DIMENSIONS

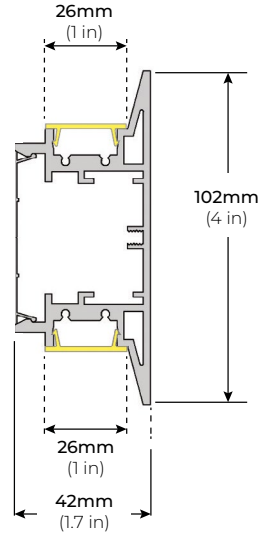

LIGHT DISTRIBUTION

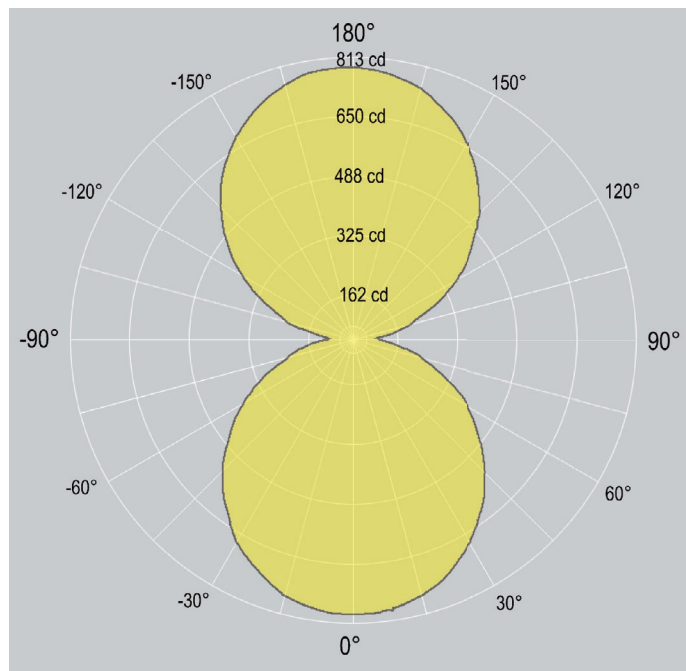

ACCESSORIES

ALP900-SC
JOINING CONNECTOR KIT

*Sold Separately

