

CORA DIRECT


DIRECT LINEAR LED WALL MOUNT

Project _____

Location _____

Quote/ Ref # _____

CORA DIRECT is an architectural LED luminaire, offered in three lumen output options up to 704 lumens per foot, and frosted lens to eliminate any hotspots for a uniform beam of light. Manufactured from extruded aluminum with three standard powder-coated color options makes this low profile luminaire ideal for retail, office, school or commercial applications.

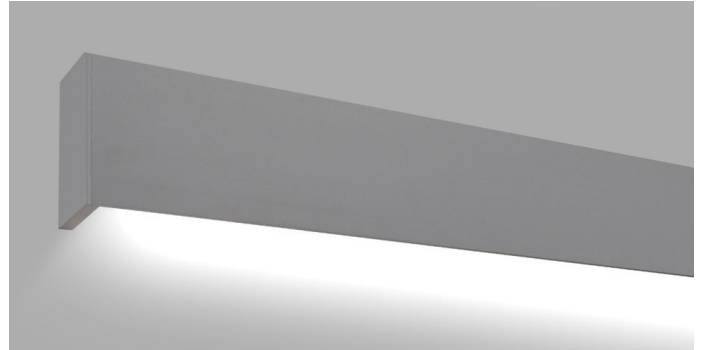

SPECIFICATIONS

INPUT VOLTAGE	24V
POWER CONSUMPTION	4W/ 5.5W/ 7W
LUMEN OUTPUT	704 Lm/ Ft. (30K)
BEAM ANGLE	180°
COLOR TEMPERATURE	27K/ 30K/ 35K/ 40K/ 50K/ 65K
MAX RUN	Linkable up to 32 ft.
CRI	90
DIMMING	ELV, 0-10V, DALI and DMX
HOUSING	Extruded Aluminum
AMBIENT TEMPERATURE ENVIRONMENT	-4° (-20°C) to 122° (50°C) Dry/ Damp Locations
CERTIFICATIONS	UL Listed
LUMEN MAINTENANCE	50,000 Hrs.
WARRANTY	5-Year Limited

FEATURES

- Wall Mounted Luminaire
- Quick and Easy Installation
- Multiple CCT options available
- UL Listed

LUMENS

CCT	WATTS (W/ FT.)	LM/FT (3000K)
L1	4W	440
L2	5.5W	529
L3	7W	704




MODEL	LENGTH	DOWNLIGHT	COLOR TEMP	FINISH	DRIVER	
CORA	4 48"	DL1 4W	27K 2700K	SI Silver	ELV ELV Dimming	
	8 96"	DL2 5.5W	30K 3000K	WH White	DIM10 0-10 Dimming	
	CU Custom Length		DL3 7W	35K 3500K	BK Black	DALI DALI Dimming
				40K 4000K	CC Custom Color	REM Remote Driver
				50K 5000K		
				65K 6500K		


CORA DIRECT

DIRECT LINEAR LED WALL MOUNT

DIMENSIONS

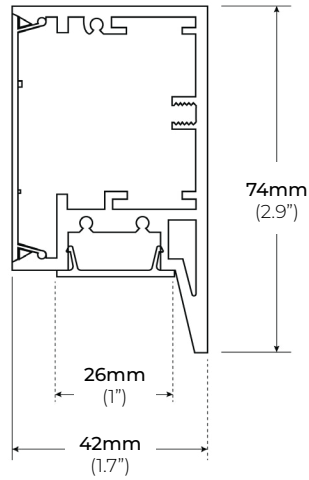

LIGHT DISTRIBUTION

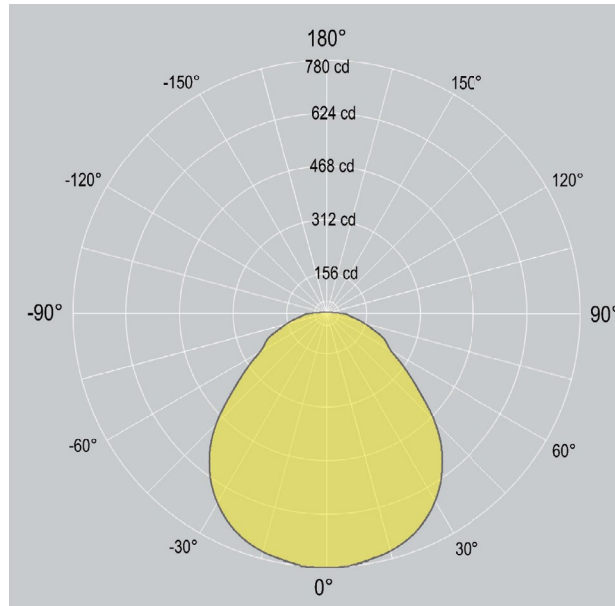

ACCESSORIES

ALP900-SC
JOINING CONNECTOR KIT

*Sold Separately

