CSL-320

DIRECT / INDIRECT LUMINAIRE


CSL-320 series is an architectural LED Luminaire with direct/indirect light distributions. Offered in three lumen output options up to 1110 Lumens per Ft., and a patented frosted lens to eliminate any hotspots for a uniform beam of light. Available in standard sizes of 4Ft., 8Ft. and 12Ft. models with the ability to connect fixtures together for longer desired sections. Manufactured from extruded aluminum with three standard powder-coated color options makes this low profile luminaire ideal for retail, office, school or commercial applications.

SPECIFICATIONS

TYPE	Curtage / Curagonation Mayont
TYPE	Surface / Suspension Mount
INPUT VOLTAGE	120-277V
POWER CONSUMPTION	3.75W 5.25W 7.5W
LUMEN OUTPUT	Up to 1110 Lm/Ft.
AVAILABLE LENGTHS	4 Ft./ 8 Ft./ 12 Ft.
FINISH	White, Black, Silver
LENS	Frosted Acrylic
COLOR TEMPERATURE	30K / 35K / 40K / 50K
CRI	90+
POWER FEED KIT	ALP-CF
NON-POWER FEED KIT	ALP-CSB



		UPDATED: 01.31.25
Project _		
Location		
0	6 U	



FEATURES

- Up to 1110 Lm/ Ft.
- 148 Lm/ W
- Superior Color Rendering Index (90+ CRI)
- · Compatible with motion sensors and controls
- Aircraft cable suspension system
- Ideal for suspended or surface applications

LUMENS

TYPE	WATTS (W/ FT.)	LM/FT		
LI	3.75W	555		
L2	5.25W	777		
L3	7.5W	1110		




MODEL	LENGTH	DOWNLIGHT	UPLIGHT	COLOR TEMP	VOLTAGE	FINISH	MOUNTING	OPTIONS
CSL320	4 Ft. (45 in.) 8 Ft. (89 in.) 12 Ft. (134 in.)	DL1 555 Lm/ Ft. DL2 777 Lm/ Ft. 1110 Lm/ Ft. BLANK No Downlight	UL1 555 Lm/ Ft. UL2 777 Lm/ Ft. UL3 1110 Lm/ Ft. BLANK No Uplight	30K 3000K 35K 3500K 40K 4000K 50K 5000K	UNV 120-277V	WH White Black Silver	C12 12ft cable Custom cable (XX=ft, ceiling to top of fixture) SM Surface Mount	LD1 0-10V 1% Dimming Multi-Circuit EM* Emergency *Only available on 4 ft. length fixture with L1 - L1 / L2 - L2 / L3 - L3


CSL-320

DIRECT / INDIRECT LUMINAIRE





SUSPENSION POINTS

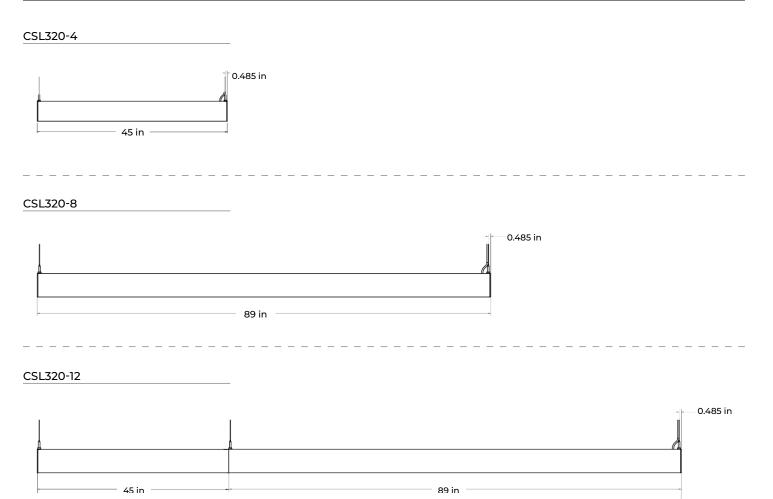

134 in




CSL-320

DIRECT / INDIRECT LUMINAIRE

SUSPENSION KIT ACCESSORIES

*REQUIRED FOR SUSPENSION MOUNTING

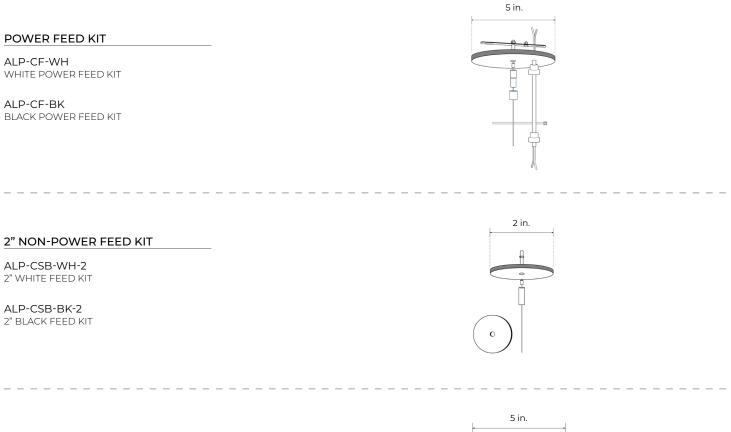

5" NON-POWER FEED KIT

ALP-CSB-WH-5 5" WHITE FEED KIT

ALP-CSB-BK-5 5" BLACK FEED KIT

