4W WARM-DIM 120V LED TAPE LIGHT

The **LSG40-WD** is a warm-dim 120V tape light offering the highest quality in direct-connect LED lighting. It can be ordered in custom lengths, in 4 inch increments and available with IP67 rating for outdoor or wet installations and applications.

SPECIFICATIONS

POWER CONSUMPTION	4W per Ft.	
LUMEN OUTPUT	220 Lumens per Ft.	
CRI	90+	
DIMMING	TRIAC	
MAXIMUM RUN LENGTH	164 Ft.	
CUTTABLE	Every 4.0 in (101.6mm)	
BINNING	MacAdam Ellipse 2-Step	
OPERATING VOLTAGE	120V AC	
OPERATING TEMPERATURE -22°F (-30°C) to +122°F (+50°C)		
BEAM ANGLE	120°	
IP RATING	IP54, IP67	
CERTIFICATIONS	ETL Listed	
LUMEN MAINTENANCE	50,000 Hrs.	



Project	01 DATED. 02.21.25
Location	
Ouote/ Ref #	



FEATURES

- Line Voltage Linear Light
- 120V AC, No power supply required
- Wet and Dry Locations
- 90+ CRI
- Suitable for Indoor/ Outdoor use
- Custom length available every 4 in.
- Dimmable
- ETL Listed




MODEL	COLOR TEMP	LED LENGTH	VOLTAGE	POWER FEED	IP RATING
LSG40-WD 18/30K 'XX 1800K/3000K per Ft. *1 = Custom length per FT. (cuttable every 4')			120 120 Volts	HWC36 36" Hardwire Power Feed Cable	IP54 Indoor/ Damp
				HWC72 72" Hardwire Power Feed Cable	IP67 Outdoor*
	, , , , , , , , , , , , , , , , , , ,		HWC120 120" Hardwire Power Feed Cable		
			HWC240 240" Hardwire Power Feed Cable		
		HWC-CUS Custom Length Wire			
	, , , , , , , , , , , , , , , , , , ,				
	length per FT.			* = Ideal for applications witl direct exposure t rain/ water (MADE TO ORDEF Please allow 3 wee lead time)	

4W WARM-DIM 120V LED TAPE LIGHT



DIMENSIONS

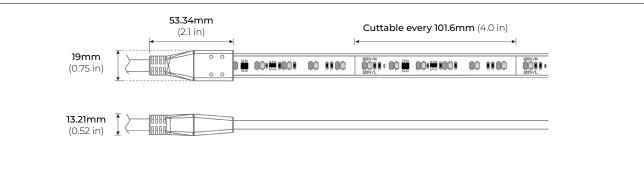

COMPATIBLE ACCESSORIES

MOUNTING CHANNEL T 8.13mm LSG-AC48 (0.32 in) LSG-AC96 1 48"AND 96" ALUMINUM CHANNEL 18.54mm (0.73 in) **MOUNTING CHANNEL & MOUNTING CLIP** LSG-CN48 26.37mm 20.66mm 48" ALUMINUM CHANNEL (1.04 in) (0.81 in) 20.07mm 16mm (0.79 in) (0.63 in) LSG-CN-CL MOUNTING CLIP 20.52mm * INCLUDED WITH LSG-CN48 (0.81 in) LSG-CN48 LSG-CN-CL 10.92mm LSG-PC48 (0.43 in) 48" PLASTIC CHANNEL 19.3mm (0.76 in) **MOUNTING CHANNEL & FROSTED LENS** LSG-AC2000FR-48 LSG-AC2000FR-84 48"AND 84" ALUMINUM CHANNEL 11 20.1mm 20.57mm 19.3mm (0.79 in) LSG-AC2000FR-EC (0.81 in) (0.76 in) 15.49mm END CAP \prec (0.61 in) 🕨 * SOLD SEPARATELY ۷ 12.7mm -19.81mm--> (0.5 in) (0.78 in)

LSG-AC2000FR-MC MOUNTING CLIP * 2PCS INCLUDED WITH EVERY 48" * 4PCS INCLUDED WITH EVERY 84"



LSG-AC2000FR

LSG-AC2000FR-EC

4W WARM-DIM 120V LED TAPE LIGHT

COMPATIBLE ACCESSORIES

LSG-AC2000-BKT-ADJ ADJUSTABLE BRACKET *SOLD SEPARATELY

LSG-AC2000-ASB ADJUSTABLE BRACKET *SOLD SEPARATELY

MOUNTING CHANNEL & FROSTED LENS

LSG-AC3100FR-48-SI 48" CHANNEL (SILVER)

LSG-AC3100FR-84-SI 84" CHANNEL (SILVER)

LSG-AC3100FR-96-SI 96" PROFILE (SILVER)

LSG-AC3100-EC-SI END CAP (SILVER) * SOLD SEPARATELY


LSG-AC3100-ECH-SI END CAP WITH HOLE (SILVER) * SOLD SEPARATELY


LSG-AC3100FR-MC

MOUNTING CLIP * 2PCS INCLUDED WITH EVERY 48" * 4PCS INCLUDED WITH EVERY 84" AND 96"


MOUNTING CLIP

LSG-MC MOUNTING CLIP









16.7mm

(0.65 in) I

0

20.9mm

(0.82 in)










4W WARM-DIM 120V LED TAPE LIGHT

COMPATIBLE ACCESSORIES

HARDWIRE POWER FEED CABLE

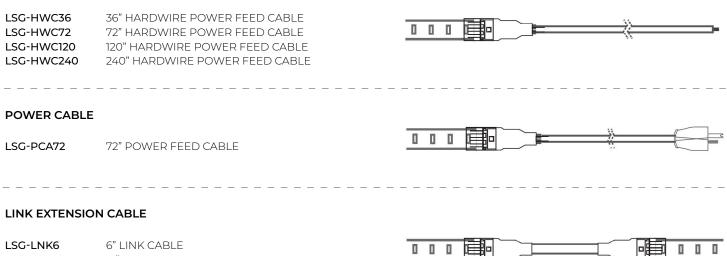

LSG-LNK6	6" LINK CABLE
LSG-LNK12	12" LINK CABLE
LSG-LNK24	24" LINK CABLE