

# LWW-SL


## HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

**LWW-SL** Linear Wall washer series is a powerful LED flood light typically used for building facades, signs or any wall washing applications. Variety of optical lens options provides endless lighting solutions. Available in narrow, medium, wide and elliptical optic options.

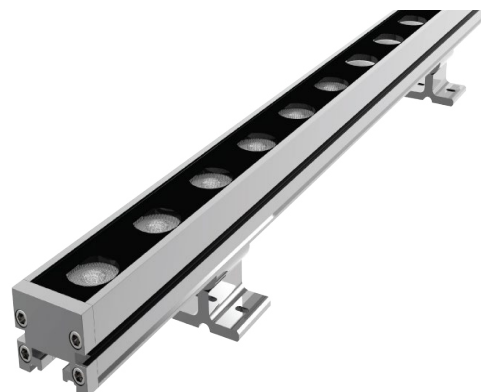

### SPECIFICATIONS

INPUT VOLTAGE	24V DC
POWER CONSUMPTION	7W per Ft.
LUMEN OUTPUT	82 Lm/ W.
CRI	90+
COLOR TEMPERATURE	22K / 27K / 30K / 40K / 50K / 60K RD / GN / BL / AM
DIMMING	TRIAC
MAX RUN	Linkable up to 12 ft.
OPERATING TEMPERATURE	-40°F TO 122°F (-40°C TO 50°C)
OPERATING TEMPERATURE	-40°F TO 176°F (-40°C TO 80°C)
BEAM ANGLE	15° / 20° / 25° / 50° / 10°x40°
IP RATING	IP65 wet location (outdoor)

### FEATURES

- 90+ CRI
- Up to 82 Lumens per Watt
- Linkable up to 12Ft.
- Proprietary Optical Technology
- TRIAC Dimming
- Proprietary Adjustable Mounting Bracket
- Facade Wall Washing
- Graze Lighting
- Signage




MODEL	LENGTH	COLOR TEMP		OPTICS	OPTIONS	FINISH	VOLTAGE	
LWWSL	12 12" (7W)	22K 2200K	RD Red	15 15°	FMB Fixed Mounting Bracket	TG Titanium Grey	24 24V DC	
	20 20" (12W)	27K 2700K	GN Green	20 20°	STB Standard Tilting Bracket	*BK Black		
		30K 3000K	BL Blue	25 25°	ETB Extended Tilting Bracket	*WH White		
	24 24" (15W)	40K 4000K	AM Amber	50 50°				
	40 40" (24W)	50K 5000K		10x40 10° x 40°				
	48 48" (29W)	60K 6000K						

\* Special order item- allow up to 4 weeks of lead time


# LWW-SL

## HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER


### DIMENSIONS

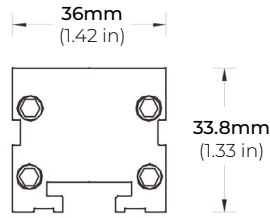


### OPTICS



15°




20°



25°




50°




10° x 40°

### MOUNTING ACCESSORIES


**LWW-SL-FMB**  
FIXED MOUNTING BRACKET  
\*Sold Separately



**LWW-SL-STB**  
STANDARD TILTING BRACKET  
\*Included with every Fixture



**LWW-SL-ETB**  
EXTENDED TILTING BRACKET  
\*Sold Separately




# LWW-SL



## HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER

### COMPATIBLE ACCESSORIES



LWW-EC  
END CAP  
\*Sold Separately

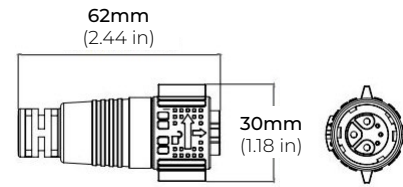

LWW-SL-12-ADLV  
LWW-SL-24-ADLV  
LWW-SL-36-ADLV  
LWW-SL-48-ADLV  
12", 24", 36", 48" ASYMMETRIC LOUVER  
\*Sold Separately



LWW-SL-12-SDLV  
LWW-SL-24-SDLV  
LWW-SL-36-SDLV  
LWW-SL-48-SDLV  
12", 24", 36", 48" SYMMETRIC LOUVER  
\*Sold Separately

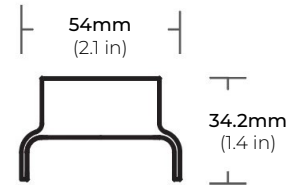

LWW-LNK-10  
LWW-LNK-36  
LWW-LNK-72  
10", 36", 72" LINK EXTENSION CABLE  
\*Sold Separately




LWW-HWC-72-BK  
72" HARDWIRE CABLE  
\*Sold Separately



## HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER


### PHOTOMETRICS

**3500K CR180**  
BEAM ANGLE (50%) 15°  
FIELD ANGLE (10%) 35°

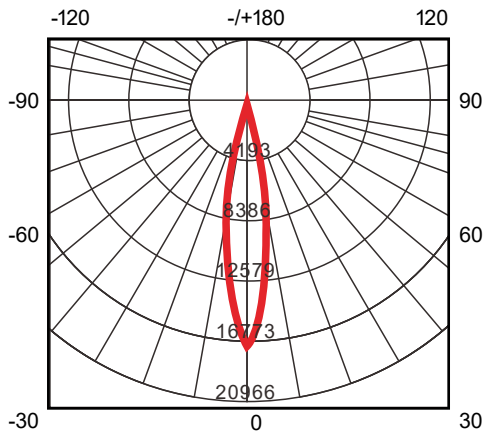


UNIT: CD  
— C0-C180    — C90-C270

**3500K CR180**  
BEAM ANGLE (50%) 30°  
FIELD ANGLE (10%) 55°

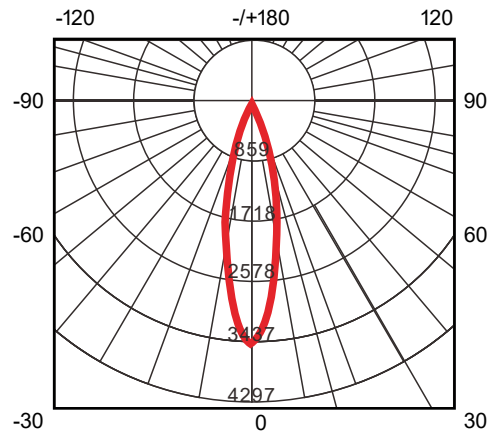


UNIT: CD  
— C0-C180    — C90-C270

**3500K CR180**  
BEAM ANGLE (50%) 15°  
FIELD ANGLE (10%) 85°

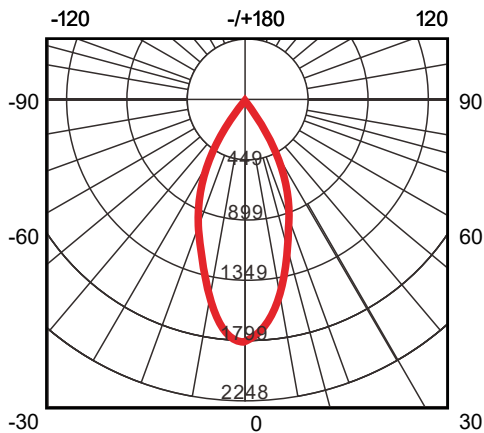

UNIT: CD  
— C0-C180    — C90-C270

**3500K CR180**  
BEAM ANGLE (50%) 10° X 40°  
FIELD ANGLE (10%) 30° X 65°

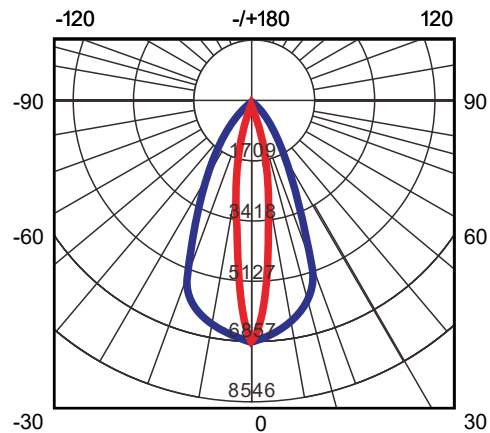


UNIT: CD  
— C0-C180    — C90-C270

## HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER

### COMPATIBLE TRANSFORMERS


#### PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.03"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.03"
PSDL-96W-24V	CLASS 2	8.67" X 3.67" X 1.62"
PSDL-150W-24V		8.67" X 3.67" X 1.62"
PSDL-192W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	10.25" X 4.06" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

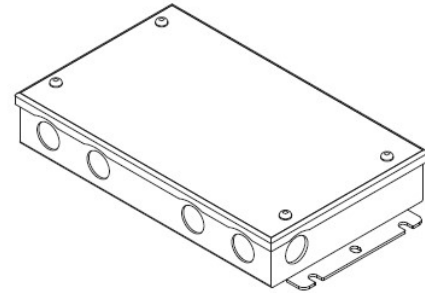


#### PSDE SERIES 0-10V DIMMING W/ JUNCTION BOX

PSDE-60W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"
PSDE-96W-24V-010-JB	CLASS 2	12.1" X 2.36" X 1.4"

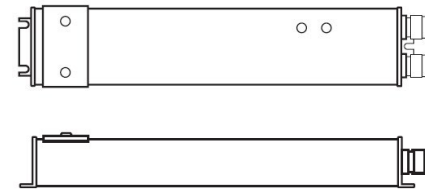


#### PSRX SERIES 4-IN-1 DIMMING DRIVER

PSRX-30W-24V	CLASS 2	6.5" X 3.72" X 1.57"
PSRX-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V		10.24" X 4.13" X 1.77"
PSRX-192W-24V	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V		10.24" X 4.13" X 1.77"
PSRX-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V		10.94" X 4.33" X 1.77"

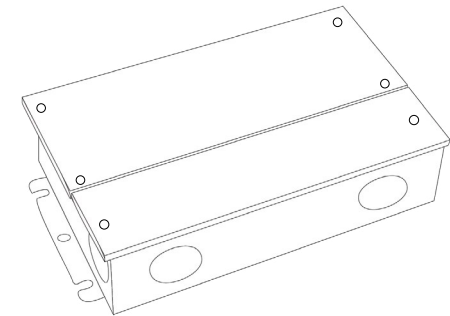

#### PSVT SERIES 0-10V DIMMING DRIVER

PSVT-60W-24V	CLASS 2	7.4" X 3.72" X 1.57"
PSVT-96W-24V	CLASS 2	8.66" X 3.72" X 1.57"
PSVT-200W-24V		10.24" X 4.13" X 1.77"
PSVT-288W-24V	CLASS 2	11.85" X 4.25" X 1.81"
PSVT-300W-24V		10.94" X 4.33" X 1.77"

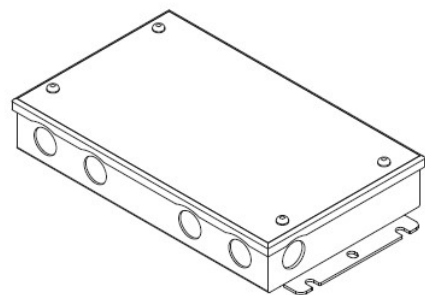


# LWW-SL

## HIGH-OUTPUT GEN-3 LINEAR LED WALL WASHER


### COMPATIBLE TRANSFORMERS

LUTRON 1%  
3-WIRE DIMMING

L3DA4U1UKL-CV240      CLASS 2    4.89" X 4" X 2.62"

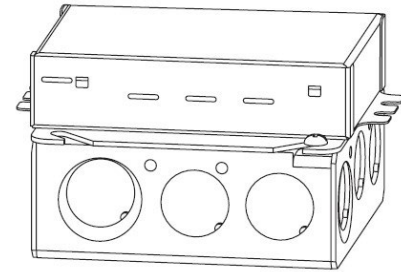

PSDE-96W-24V-ECO      CLASS 2    10.5" X 3.0" X 2.0"



### COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES  
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

