

# SLINQ-40

## RECESSED TRIMLESS 360° ROUND NEON SERIES

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

Set your creativity free and unleash the endless possibilities with **SLINQ-40** Neon Series. Featuring a 360° light source and recessed trimless mounting options, this flexible neon ensures brilliant illumination from any angle, no matter how it's mounted. Discover what you can create.



### SPECIFICATIONS

<b>POWER CONSUMPTION</b>	4.5W/ Ft. (SLQ40-SO) 5.5W/ Ft. (SLQ40-HO)
<b>LUMEN OUTPUT</b>	Up to 399 Lm/ Ft. (SLQ40-SO) Up to 642 Lm/ Ft. (SLQ40-HO)
<b>CRI</b>	90+
<b>COLOR TEMPERATURE</b>	23K/ 27K/ 30K/ 40K
<b>MAXIMUM RUN LENGTH</b>	16 Ft.
<b>OPERATING VOLTAGE</b>	24V
<b>STORAGE TEMPERATURE</b>	0°F (0°C) to 140°F (60°C)
<b>OPERATING TEMPERATURE</b>	-13°F (-25°C) to 131°F (55°C)
<b>BEAM ANGLE</b>	360°
<b>IP RATING</b>	IP65 Outdoor/ Wet Location
<b>LUMEN MAINTENANCE</b>	> 36,000 Hrs.

### FEATURES

- 360° Light Source
- Recessed Trimless Options
- Universal Dimming
- IP65 Outdoor Rated
- Factory-Installed Power Feed
- Ideal for Decorative, Retail, Artistic Lighting
- UL Listed (US and Canada)



MODEL	OUTPUT	LENGTH	COLOR TEMP	VOLTAGE	POWER FEED
SLQ40	SO Standard Output (4.5W)	Per Inch Per Inch	23K 2300K	24V 24 Volts	EF72 72" End Feed
			27K 2700K		SF72 72" Side Feed
	HO High Output (5.5W)	30K 3000K			
	40K 4000K				

# SLINQ-40

## RECESSED TRIMLESS 360° ROUND NEON SERIES

### ACCESSORIES

---

**SLQ40-RSM-WH**  
WHITE RECESSED MOUNT KIT



**SLQ40-TSM-WH**  
WHITE TRIMLESS MOUNT KIT



### CEILING MOUNTING KIT

---

Ø50MM x 47mm (D x H)


**SLQ40-CMK-WH**  
WHITE CEILING MOUNT KIT

**SLQ40-CMK-BK**  
BLACK CEILING MOUNT KIT

**SLQ40-CMK-SI**  
SILVER CEILING MOUNT KIT



**SLQ40-VMC**  
VISIBLE MOUNTING CLIP  
25mm x 59mm x 43.2mm (L x W x H)



**SLQ40-PC39**  
39" MOUNTING CHANNEL  
1000mm x 59mm x 43.2mm (L x W x H)




**SLQ40-DMB**  
DISCREET MOUNTING BRACKET  
32.2mm x 14.3mm x 4.9mm (L x W x H)




# SLINQ-40

## RECESSED TRIMLESS 360° ROUND NEON SERIES

### DIMENSIONS

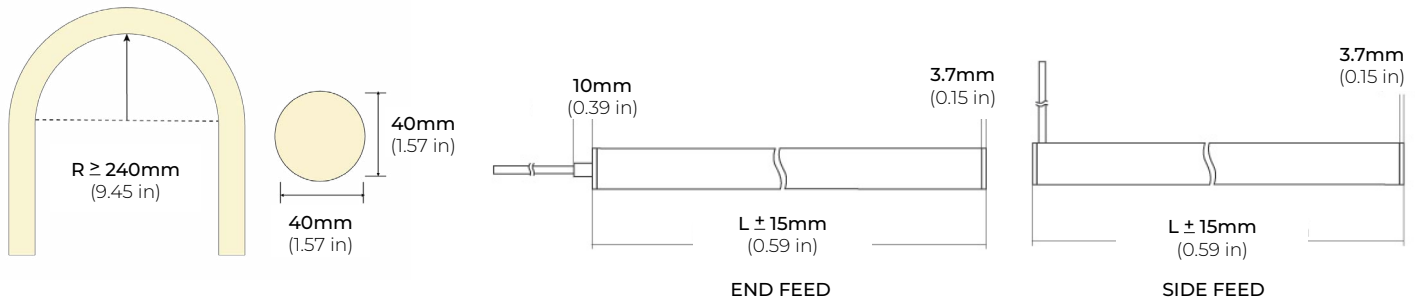

### LIGHT DISTRIBUTION

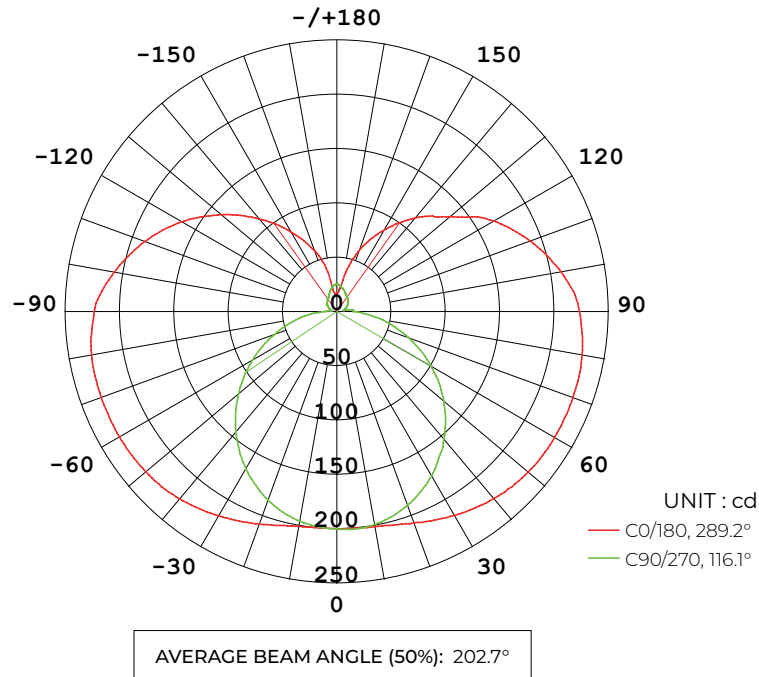


# SLINQ-40

## RECESSED TRIMLESS 360° ROUND NEON SERIES

### COMPATIBLE TRANSFORMERS


#### PSDL SERIES TRIAC DIMMABLE

PSDL-30W-24V	CLASS 2	6.5" X 3.63" X 1.58"
PSDL-60W-24V	CLASS 2	7.4" X 3.63" X 1.58"
PSDL-96W-24V	CLASS 2	8.67" X 3.67 X 1.62"
PSDL-150W-24V		10.25" X 4.06" X 1.82"
PSDL-192W-24V	CLASS 2	11" X 4" X 1.82"
PSDL-200W-24V		10.25" X 4.06" X 1.82"
PSDL-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSDL-300W-24V		10.25" X 4.06" X 1.82"

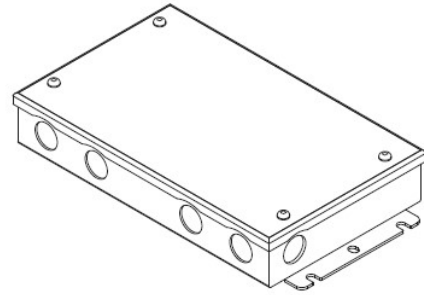


#### PSDH SERIES HIGH PERFORMANCE MAGNETIC LOW VOLTAGE (MLV)

PSDH-48W-24V	CLASS 2	11.25" X 3.38" X 3.38"
PSDH-96W-24V	CLASS 2	11.25" X 3.38" X 3.37"
PSDH-288W-24V	CLASS 2	14.25" X 8.43" X 4.43"

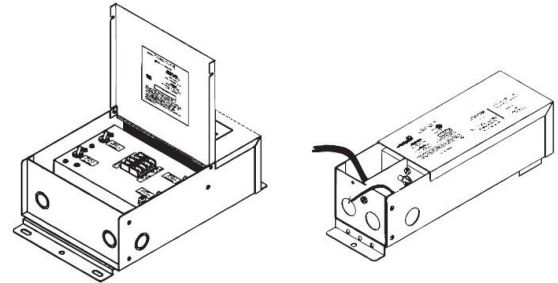


#### PSRX SERIES 4-IN-1 DIMMING DRIVER W/ JUNCTION BOX

PSRX-30W-24V-UNV	CLASS 2	6.5" X 3.7" X 1.57"
PSRX-60W-24V-UNV	CLASS 2	7.4" X 3.72" X 1.57"
PSRX-96W-24V-UNV	CLASS 2	8.66" X 3.72" X 1.57"
PSRX-150W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-192W-24V-UNV	CLASS 2	11" X 4" X 1.82"
PSRX-200W-24V-UNV		10.24" X 4.13" X 1.77"
PSRX-288W-24V-UNV	CLASS 2	11.85" X 4.25" X 1.82"
PSRX-300W-24V-UNV		10.94" X 4.33" X 1.77"

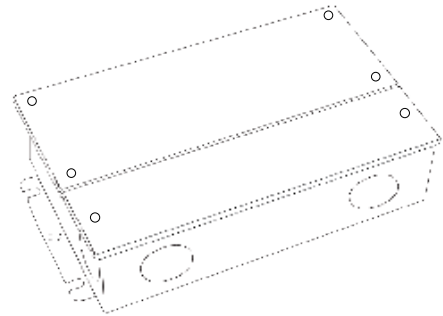

#### LUTRON 1% 3-WIRE DIMMING

L3DA4U1UKL-CV240	CLASS 2	4.89" X 4" X 2.62"
------------------	---------	--------------------

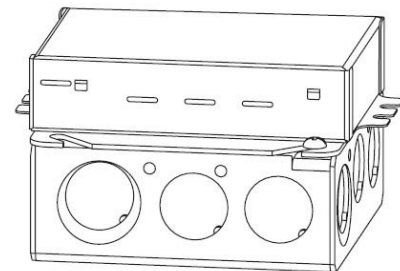

# SLINQ-40


## RECESSED TRIMLESS 360° ROUND NEON SERIES

### COMPATIBLE TRANSFORMERS

---

LUTRON 1%  
3-WIRE DIMMING

PSDE-96W-24V-ECO CLASS 2 10.5" X 3.0" X 2.0"



### COMPATIBLE NON-DIMMING DRIVERS

---

PSHK SERIES  
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

