

LPS-TW CUSTOM PANEL


CUSTOMIZABLE TUNABLE WHITE LED SHEET PANEL

Project _____

Location _____

Quote/ Ref # _____

Manufactured with high-quality light guide plate with advanced laser dot technology for uniform and seamless illumination and maximum brightness. Suitable for: Hospitality, Retail, Residential, Bars, Restaurants, Accent Lighting, Cove lighting, Millwork, Branding, Signage and Custom Fixtures.

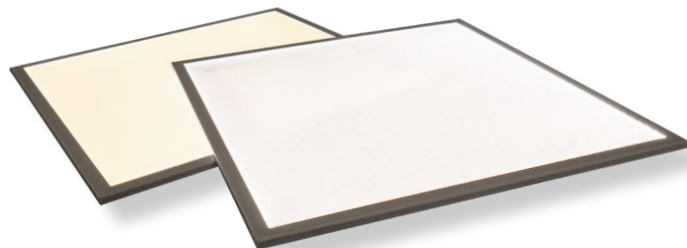

SPECIFICATIONS

INPUT VOLTAGE	12V 24V DC
POWER CONSUMPTION	4.5W/ Sq Ft.
THICKNESS	8mm
LUMEN OUTPUT	95 Lm/ W
CRI	90+
WIRE SIZE	20 AWG 3 Wire
MAXIMUM SIZE	118 in. x 59 in. (L x W)
WEIGHT	1.95 lbs/ sq ft.
OPERATING VOLTAGE	120-277V
SURFACE LUX	2,000 - 10,000 LUX
UNIFORMITY	>85%
DIMMING	MLV, ELV, 0-10V, DALI and DMX
OPERATING TEMPERATURE	-22°F (-30°C) to 104°F (40°C)
ENVIRONMENT	Dry/ Damp Location only (Indoor)
LUMEN MAINTENANCE	50,000 Hrs.

FEATURES

- Available in 12V or 24V DC
- Dimmable to 1%
- 8mm Thickness
- Any shape or size up to 118" x 59" (L x W)

* Approved for closet/ storage space installation per NEC 410. 16(A)(3) and 410. 16(C)(5)




MODEL	COLOR TEMP	SIZE	LENS	POWER FEED	VOLT
LPS	TW Tunable White 27K/65K	*XX Custom	*FR Frosted Diffuser CL Clear Acrylic LGP	<u>Side Feed</u> A1 A2 A3 A4 A5 A6 A7 A8 <u>Back Feed</u> B1 B2 B3 B4	12V 12V 24V 24V DC
		* L x W (length x width) Please consult factory	* Standard Model	See page 3 for powerfeed reference	


LPS-TW CUSTOM PANEL

CUSTOMIZABLE TUNABLE WHITE LED SHEET PANEL

DIMENSIONS

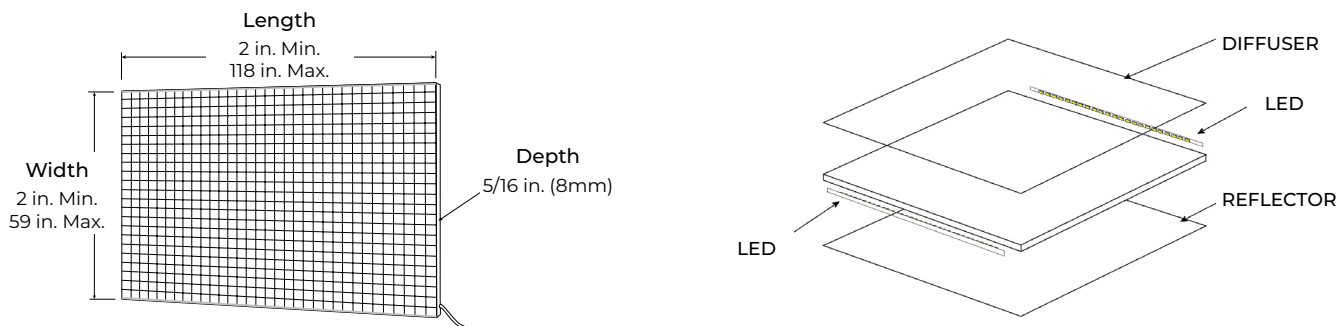

SURFACE ILLUMINATION

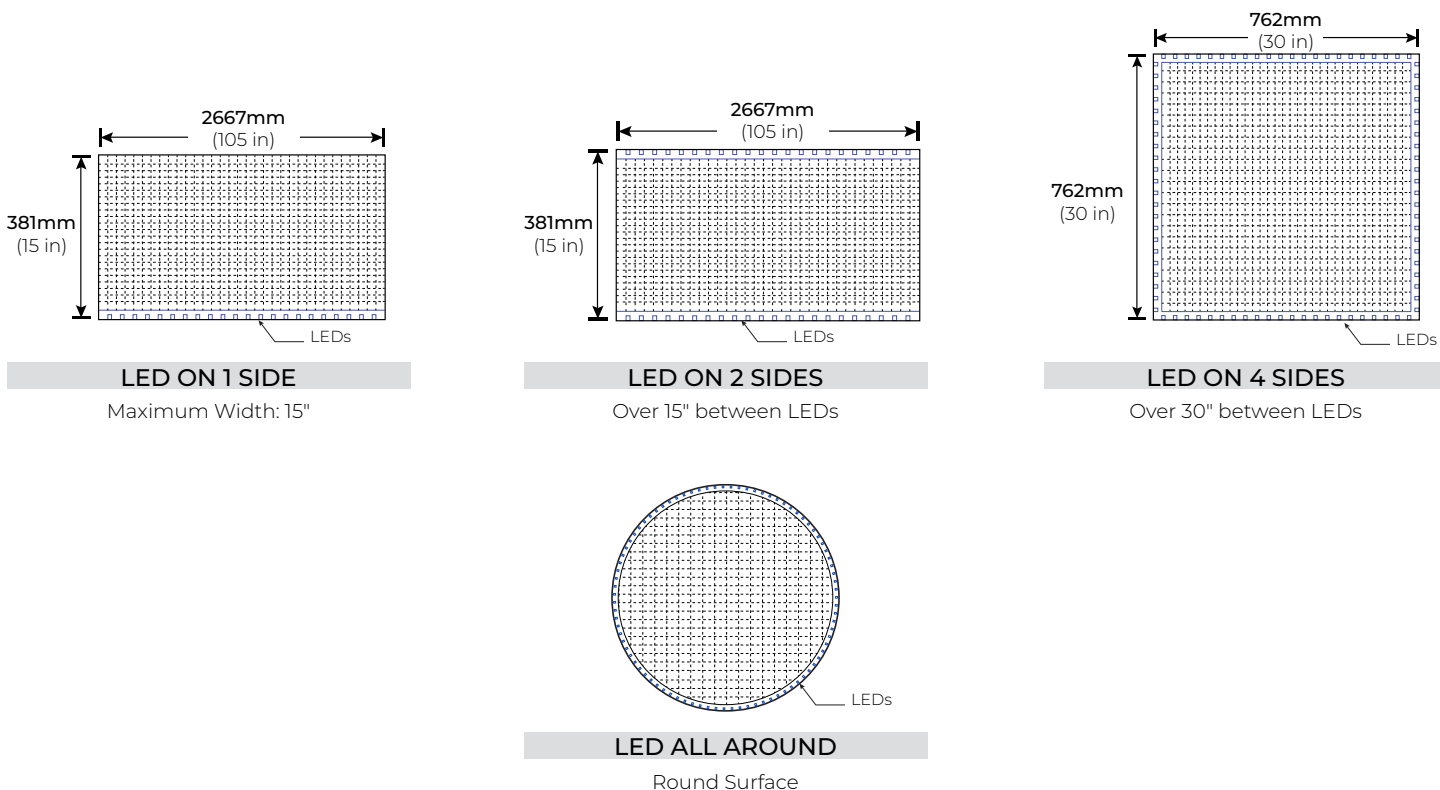

ILLUMINATION GUIDE

SIZE	LED STRIP	SURFACE BRIGHTNESS	WATT
6 in. x 6 in.	1 Side	6,000 Lx	2W
12 in. x 12 in.	1 Side	3,000 Lx	4W
24 in. x 24 in.	2 Sides	3,200 Lx	15W
36 in. x 36 in.	2 Sides	2,600 Lx	23W
Ø 12 in.	All Around	13,000 Lx	11.2W
Ø 24 in.	All Around	5,400 Lx	24W
Ø 36 in.	All Around	4,500 Lx	36W

LPS-TW CUSTOM PANEL


CUSTOMIZABLE TUNABLE WHITE LED SHEET PANEL

MOUNTING ACCESSORIES

Hardware provided by others.



SCREWS

*Holes are drilled during the manufacturing process according to specification drawings.

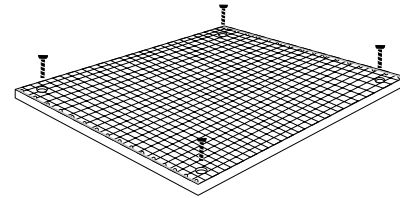


Z-CLIPS

*Screw Z-Clips to the back of the frame and to the wall.

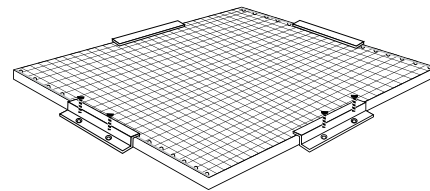



MIRROR CLIPS

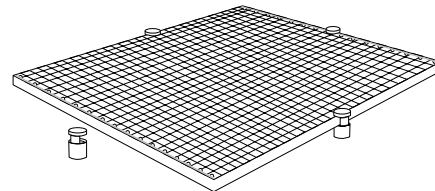


POWER FEED OPTIONS

TYPE A SIDE FEED


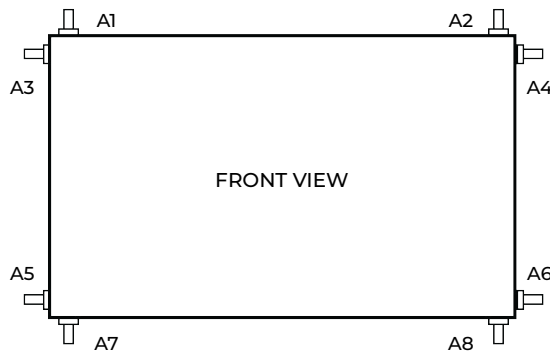


SIDE VIEW




STANDARD EXIT

TYPE B BACK FEED

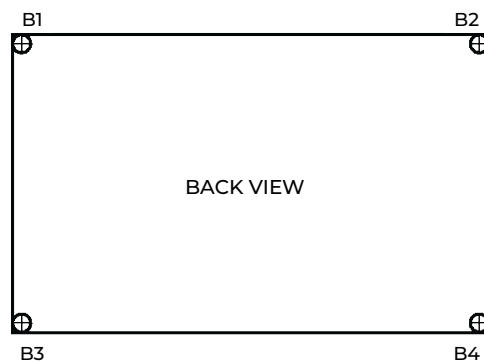

SIDE VIEW



REAR EXIT

LPS-TW CUSTOM PANEL


CUSTOMIZABLE TUNABLE WHITE LED SHEET PANEL

DMX CONTROLLERS

RGB-CT600

MULTI-FUNCTION RGBW WALL CONTROLLER


INPUT VOLTAGE	5V DC, 1A
OUTPUT SIGNAL	RF 2.4GHZ + DMX512
CONTROL	4 ZONES
COLOR OPTIONS	Black/ White
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.19"x7.08"x1.38")



RGB-SCW4

WiFi DMX WALL CONTROLLER


INPUT VOLTAGE	5 - 10V DC, 06A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ 8dry contact ports/ Open drain output (for relay)
MEMORY	Built-In Flash
WORKING TEMP	-10°C ~ 45°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")



RGB-SDE3

WiFi DMX WALL CONTROLLER

INPUT VOLTAGE	6V DC, 0.6A
OUTPUT SIGNAL	DMX512 (x2)
PROGRAMMABILITY	PC/ MAC/ Tablet/ Smartphone
COLOR OPTIONS	Black/ White
CONNECTIONS	USB/ Ethernet/ RS232/ CLock/ 8dry contact ports/ 5V output relay
MEMORY	MicroSD Card
WORKING TEMP	-20°C ~ 40°C
DIMENSIONS	LxWxH (5.75"x4.17"x0.43")




LPS-TW CUSTOM PANEL

CUSTOMIZABLE TUNABLE WHITE LED SHEET PANEL

DMX DECODERS


RGB-DMX-4C-RJ45 4-CHANNEL DMX DECODER

INPUT VOLTAGE	12V-24V DC
OUTPUT CURRENT	5A X 4CH
OUTPUT WATTAGE	60W(12V), 120W(24V)
OUTPUT CHANNELS	4
DIMENSIONS	LxWxH (7"x1.77"x0.75")

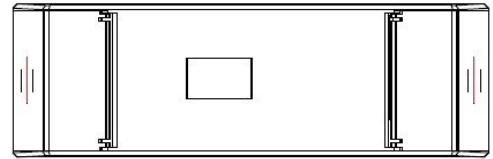

RGB-DMX-5C-XLR 5-CHANNEL DMX DECODER

INPUT VOLTAGE	12V-24V DC
OUTPUT CURRENT	8A X 5CH
OUTPUT WATTAGE	5 x (96W ~ 192W)
OUTPUT CHANNELS	5
DIMENSIONS	LxWxH (6.45"x2.87"x1.5")

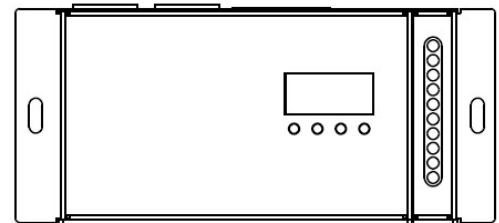

LPS-TW CUSTOM PANEL

CUSTOMIZABLE TUNABLE WHITE LED SHEET PANEL

COLOR TUNING CONTROL MODULE

PSDE-TW2-010-CT
0-10V CONTROL

INPUT VOLTAGE	8-48V DC
INPUT CURRENT	5.1A MAX (per channel)
INPUT CONTROL	2
OUTPUT CURRENT	5A
MAX OUTPUT POWER	240W
DIMENSIONS	LxWxH (3.86" X 1.73" X 0.57")



COMPATIBLE NON-DIMMING DRIVERS

PSHK SERIES
NON-DIMMING CONSTANT VOLTAGE WITH JUNCTION BOX

PSHK-30W-24V	CLASS 2	6.5" X 3.6" X 1.02"
PSHK-60W-24V	CLASS 2	7.4" X 3.62" X 1.02"
PSHK-96W-24V	CLASS 2	8.66" X 3.66" X 1.61"
PSHK-150W-24V		10.24" X 4.06" X 1.81"
PSHK-200W-24V		10.24" X 4.06" X 1.81"
PSHK-288W-24V	CLASS 2	11.85" X 4.25" X 1.82"
PSHK-300W-24V		10.24" X 4.25" X 1.81"

