

# LWW120-HO

## 120V-277V HIGH-PERFORMANCE LED WALL WASHER

UPDATED: 12.04.24

Project \_\_\_\_\_

Location \_\_\_\_\_

Quote/ Ref # \_\_\_\_\_

**LWW120-HO** Linear Wall washer series is a powerful 120V LED flood light typically used for building facades, signs or any wall washing application Available in multiple optical lens options to provide endless lighting solutions. Available in narrow, medium, wide and elliptical optic options.



### SPECIFICATIONS

INPUT VOLTAGE	100-277V AC
OPERATING FREQUENCY	50-60Hz
POWER CONSUMPTION	12W/Ft.
LUMEN OUTPUT	100 Lm/W (35K)
COLOR TEMPERATURE	27K / 30K / 40K / 50K / 60K / RD / GN / BL
BEAM ANGLE	10° / 20° / 35° / 50° / 15° x 40°
MAX RUN	Linkable up to 60 ft
CRI	90+
DIMMING	0-10V
OPERATING TEMPERATURE	-40°F (-40°C) to 122°F (50°C)
STORAGE TEMPERATURE	-40°F (-40°C) to 185°F (85°C)
HOUSING	6063 Extruded aluminum
IP RATING	IP66 Outdoor/Wet Location
CERTIFICATIONS	ETL Listed
LUMEN MAINTENANCE	50,000 hrs.

### FEATURES

- Linkable up to 60 ft.
- Multiple Beam Angles
- Multiple CCT Options Available
- Proprietary Adjustable Mounting Bracket
- Facade Wall Washing
- Graze Lighting
- Signage
- ETL Listed




MODEL	LENGTH	COLOR TEMP	OPTICS	FINISH	OPTIONS	VOLTAGE	
LWW120-HO	12 12 in (12W)	27K 2700K	10 10°	TG Titanium Grey	ADLV Asymmetric Anti-Glare Louver	UNV 120V-277V	
		30K 3000K	20 20°	*WH White	SDLV Symmetric Anti-Glare Louver		
	24 24 in (24W)	40K 4000K	35 35°	*BK Black			
		50K 5000K	50 50°				
	36 36 in (36W)	60K 6000K	1540 15° x 40°				
		RD Red					
		GN Green					
		BL Blue					
					*Allow 4 weeks lead time		


# LWW120-HO

## 120V-277V HIGH-PERFORMANCE LED WALL WASHER

### DIMENSIONS

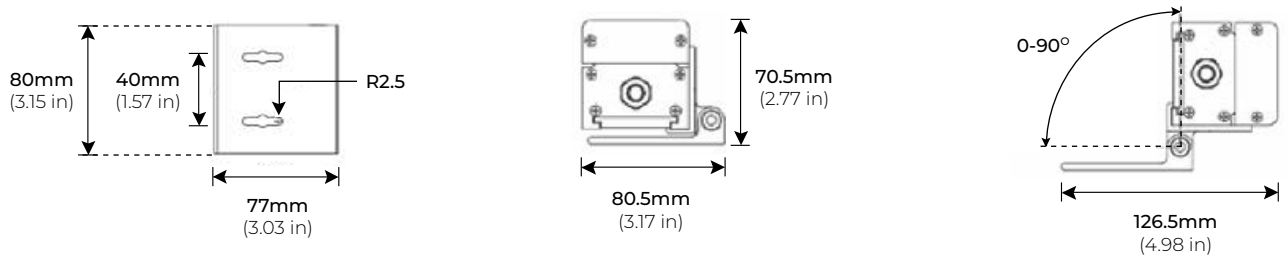

### OPTICS

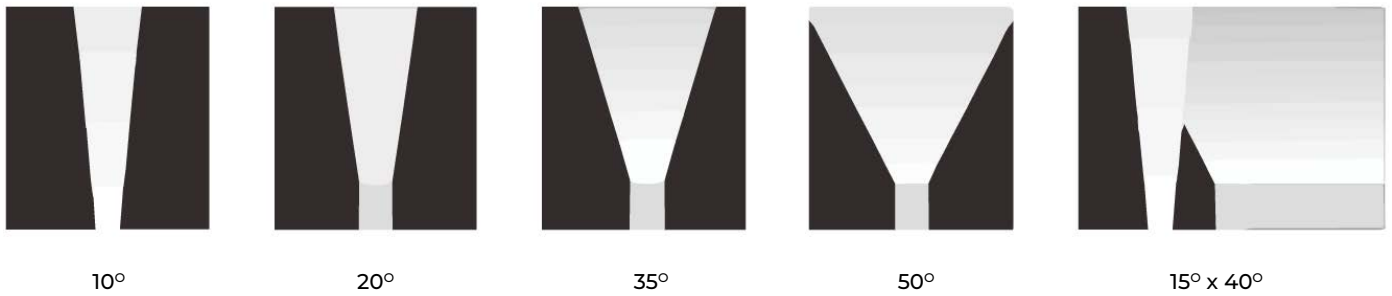


# LWW120-HO


## 120V-277V HIGH-PERFORMANCE LED WALL WASHER

### COMPATIBLE ACCESSORIES


LWW-EC  
END CAP  
\*Sold Separately

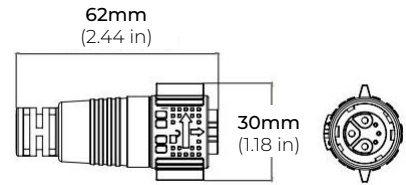

LWW120-HO-12-ADLV  
LWW120-HO-24-ADLV  
LWW120-HO-36-ADLV  
LWW120-HO-48-ADLV  
12", 24", 36", 48" ASYMMETRIC LOUVER  
\*SOLD SEPARATELY

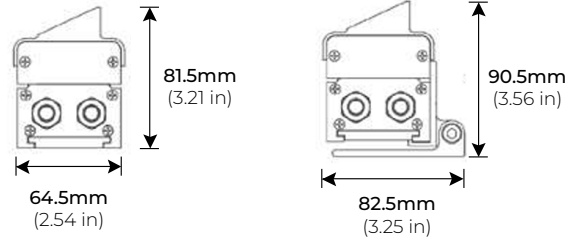

LWW120-HO-12-SDLV  
LWW120-HO-24-SDLV  
LWW120-HO-36-SDLV  
LWW120-HO-48-SDLV  
12", 24", 36", 48" SYMMETRIC LOUVER  
\*SOLD SEPARATELY

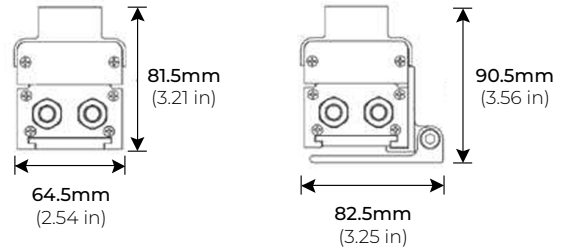

LWW120-LNK-10  
LWW120-LNK-36  
LWW120-LNK-72  
10", 36", 72" LINK EXTENSION CABLE  
\*SOLD SEPARATELY



LWW120-HWC-72  
LWW120-HWC-120  
72" AND 120" HARDWIRE CABLE  
\*SOLD SEPARATELY

